
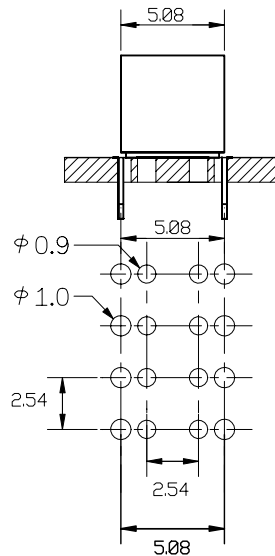
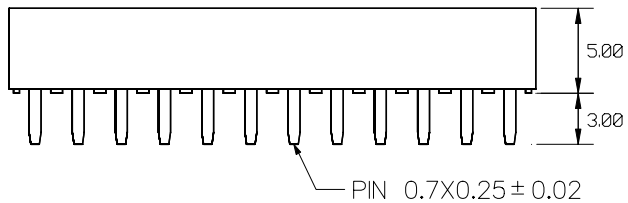
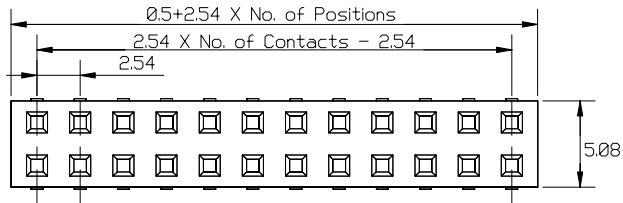


RoHS compliant



SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic
 UL94V-0

Ordering Code:

EFD01C- X - X - X
 ① ② ③ ④

- ① Series No:
- ② No. of Contact
04 TO 80
- ③ Contact Plating
 A: Gold Flash
 E: 3u" Gold
 B: 10u" Gold
 C: 15u" Gold
 D: 30u" Gold
 T: Tin Plated
- ④ Code Packing
 A: Tube
 B: Tray

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG.
 0.
 0 ±0.25
 .00 ±0.2

SCALE: AS SHOWN UNIT: mm

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
 Tel: +49 (0)711 / 358 110 20 | Fax: +49 (0)711 / 358 110 25

| | |
|----------|--|
| DRAWN | TITLE: 254mm Female Header, Straight Type Profile: 5.0mm |
| CHECKED | |
| APPROVED | DRAWN NO: EFD01C-XXX-1 |
| DATE | PRODUCT NO. EFD01C-XXXX |

| | | |
|-----|-------------|------|
| REV | DESCRIPTION | DATE |
| | | |
| | | |
| | | |