


RoHS compliant



## SPECIFICATION

Current Rating: 3 Amp  
 Insulation Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms Max  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -65 ° C to +125° C  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Plastic  
 UL94V-0

Ordering Code:





EFD01D- X - X - X  
 ① ② ③ ④

① Series No:

② No. of Contact  
 04 TO 80

③ Contact Plating  
 A: Gold Flash  
 E: 3u" Gold  
 B: 10u" Gold  
 C: 15u" Gold  
 D: 30u" Gold  
 T: Tin Plated

④ Code Packing  
 A: Tube  
 B: Tray

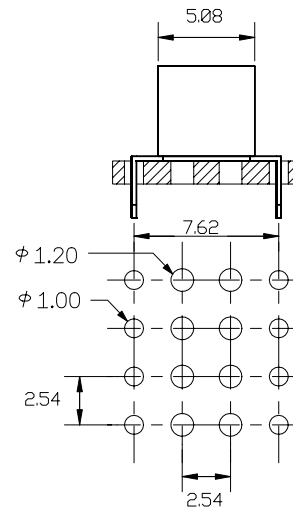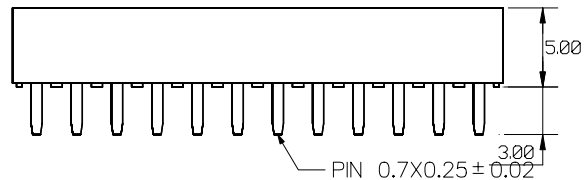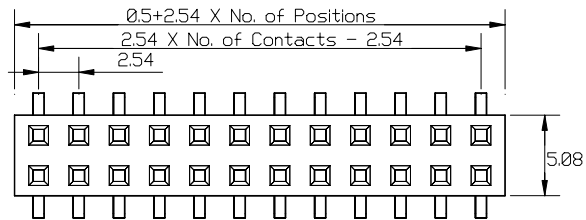

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG.  
 0.  
 0 ±0.25  
 .00 ±0.2

SCALE: AS SHOWN UNIT: mm

**Allconnectors**

www.allconnectors.eu | info@allconnectors.eu  
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DRAWN	TITLE: 254mm Female Header, Straight Type Profile: 5.0mm
CHECKED	
APPROVED	DRAWN NO: EFD01D-XXX-1
	PRODUCT NO. EFD01D-XXXX

REV	DESCRIPTION	DATE