


RoHS compliant



# SPECIFICATION

Current Rating: 3 Amp  
 Insulation Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms Max  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -65 ° C to +125° C  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Plastic  
 UL94V-0

Ordering Code:

EFD02- X - X - X - X  
 ① ② ③ ④ ⑤

① Series No: ⑤ Code Packing









② No. of Contact A: Tube  
 04 TO 80 B: Tray

③ Connector Type

A: Type A  
 B: Type B  
 C: Type C

④ Contact Plating

A: Gold Flash  
 E: 3u" Gold  
 B: 10u" Gold  
 C: 15u" Gold  
 D: 30u" Gold  
 T: Tin Plated

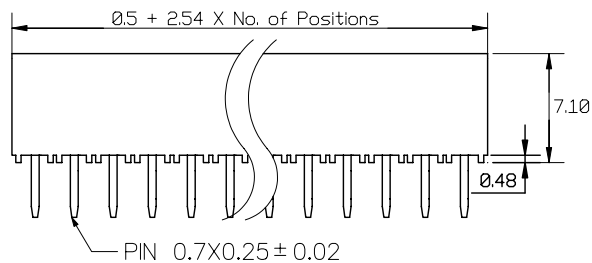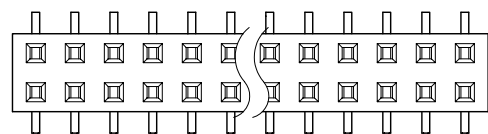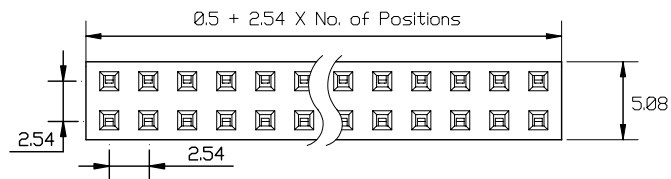

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG.  
 0.  
 0 ±0.25  
 .00 ±0.2

SCALE: AS SHOWN UNIT: mm

**Allconnectors**

www.allconnectors.eu | info@allconnectors.eu  
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DRAWN

TITLE:  
 2.54mm Female Header, Straight Type  
 Profile: 7.1mm

CHECKED

APPROVED

DRAWN NO: EFD02-XXXX-1

REV

DESCRIPTION

DATE

PRODUCT NO. EFD02-XXXX