

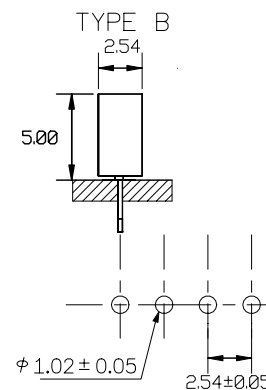
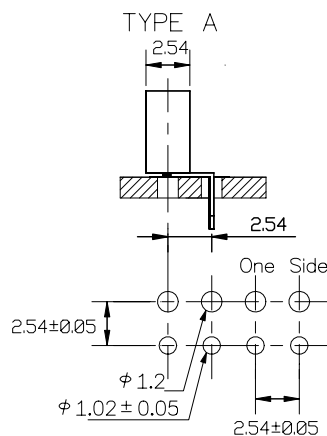
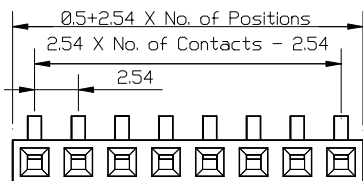


RoHS compliant

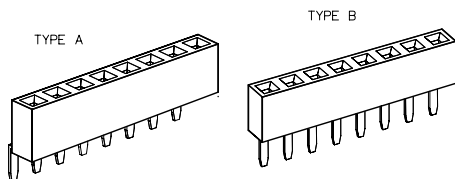

Recommended P.C.Board Hole Layout

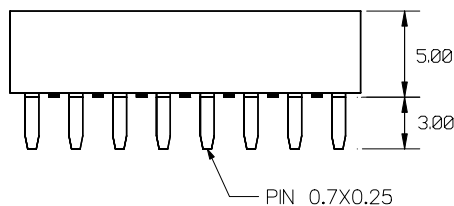

## SPECIFICATION

Current Rating: 3 Amp  
 Insulation Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms Max  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -65 ° C to +125° C  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Plastic UL94V-0

Ordering Code:

EFD03- X - X - X - X  
 ① ② ③ ④ ⑤

- ① Series No: ⑤ Code Packing
- ② No. of Contact: A: Tube  
B: Tray  
04 TO 40
- ③ Connector Type  
A: Type A  
B: Type B
- ④ Contact Plating  
A: Gold Flash  
E: 3u" Gold  
B: 10u" Gold  
C: 15u" Gold  
D: 30u" Gold  
T: Tin Plated

UNLESS OTHERWISE SPECIFIED TOLERANCE		 <small>www.allconnectors.eu   info@allconnectors.eu Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25</small>
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	TITLE: 2.54mm Female Header, Straight Type Single Row, Profile: 5.0mm  DRAWN NO: EFD03-XXXX-1 PRODUCT NO. EFD03-XXXX
DRAWN		
CHECKED		
APPROVED		
REV	DESCRIPTION	DATE