

RoHS compliant







SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Brass
 Insulator Material: High Temperature Plastic
 UL94V-0

Ordering Code:

EFD11- X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contact
 A: 03 TO 40
 B: 04 TO 80
- ③ Connector Type
 A: Single Row
 B: Dual Row
- ④ Connector Material
 A: Brass
- ⑤ Contact Plating
 A: Gold Flash
 E: 3u" Gold
 B: 10u" Gold
 C: 15u" Gold
 D: 30u" Gold
- ⑥ Code Packing
 B: Tray

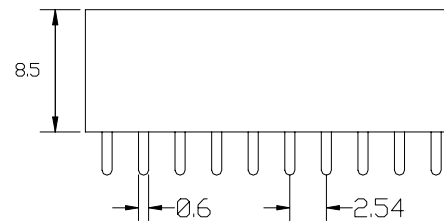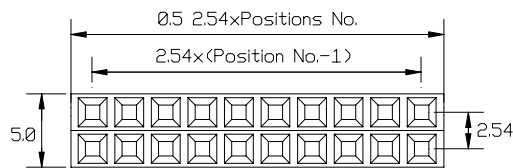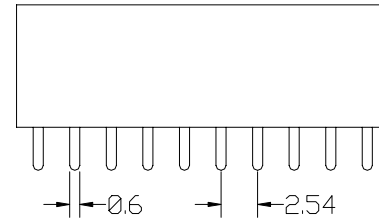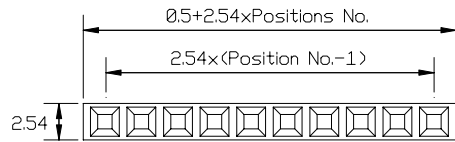

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG.
 0
 0 ±0.25
 .00 ±0.2

SCALE: AS SHOWN UNIT: mm

Allconnectors
 www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

REV	DESCRIPTION	DATE	DRAWN	TITLE: 2.54mm Female Header, Straight Type Profile: 8.5mm
			CHECKED	DRAWN NO: EFD11-XXXXX-1
			APPROVED	PRODUCT NO. EFD11-XXXXX