


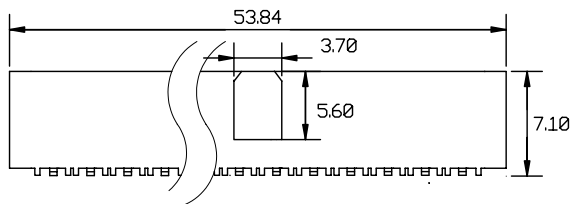

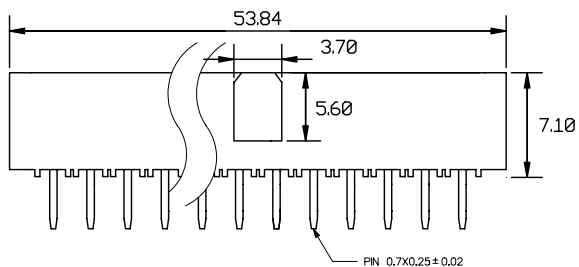


RoHS compliant

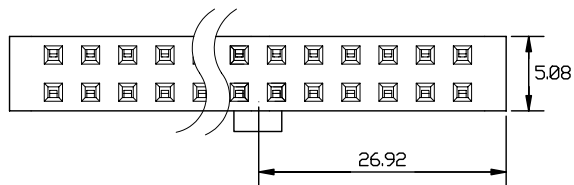


SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic
 UL94V-0

Ordering Code:

EFD13- X - X - X - X
 ① ② ③ ④ ⑤

- ① Series No:
- ② No. of Contact
40 Pins
- ③ Connector Type
A: Straight Type
B: SMT Type
- ④ Contact Plating
A: Gold Flash
E: 3u" Gold
B: 10u" Gold
C: 15u" Gold
D: 30u" Gold
- ⑤ Code Packing
A: Tube
B: Tray (Straight Type only)

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. 0. 0 ±0.25 00 ±0.2	 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>	
DRAWN	TITLE: 2.54mm Female Header Profile: 7.1mm	
CHECKED	DRAWN NO: EFD13-XXXX-1	
APPROVED	PRODUCT NO. EFD13-XXXX	

REV	DESCRIPTION	DATE