

RoHS compliant

SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic
 UL94V-0

Ordering Code:

EFD12- X - X - X - X
 ① ② ③ ④ ⑤




① Series No:

② No. of Contact
 A: 03 TO 40
 04 TO 80

③ Special Function
 A: Profile:5.0mm
 B: Profile 7.1mm

④ Contact Plating
 A: Gold Flash
 E: 3u" Gold
 B: 10u" Gold
 C: 15u" Gold
 D: 30u" Gold

⑤ Code Packing
 A: Tube

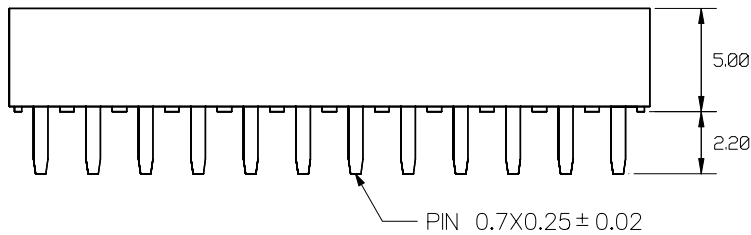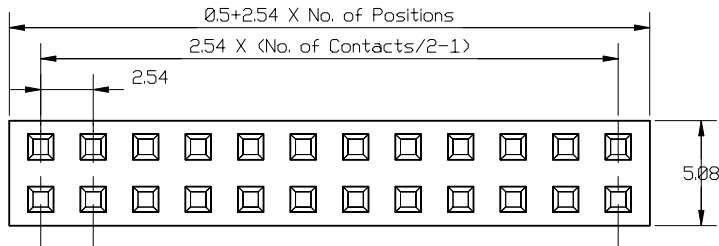

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. 0. 0 ±0.25 00 ±0.2	 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>	
	SCALE: AS SHOWN	UNIT: mm
DRAWN	TITLE: 2.54mm Female Header ,Straight Type	
CHECKED	DRAWN NO: EFD14-XXXX-1	
APPROVED	PRODUCT NO. EFD14-XXXX	

REV	DESCRIPTION	DATE