


RoHS compliant




SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic
 UL94V-0


Ordering Code:

EFD15- X - X - X - X
 ① ② ③ ④ ⑤


- ① Series No:
- ② No. of Contact
04 TO 80
- ③ Connector Type
A: Type A
B: Type B
C: Type C
- ④ Contact Plating
A: Gold Flash
E: 3u" Gold
B: 10u" Gold
C: 15u" Gold
D: 30u" Gold
T: Tin Plated
- ⑤ Code Packing
A: Tube
B: Tray

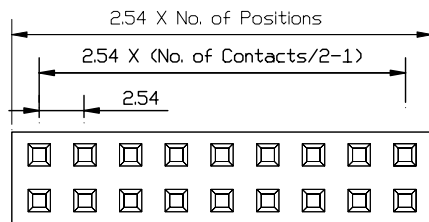



A TYPE



B TYPE



C TYPE

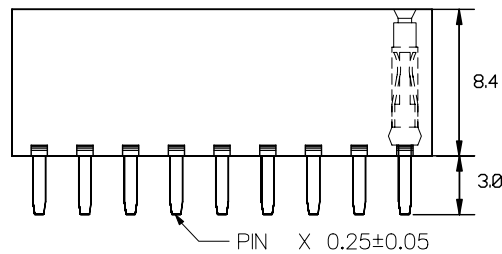

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. 0. 0 ±0.25 00 ±0.2	 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>	
DRAWN	TITLE: 2.54mm Female Header, Straight Type Profile: 8.4mm	
CHECKED	DRAWN NO: EFD15-XXXX-1	
APPROVED	PRODUCT NO. EFD15-XXXX	

REV	DESCRIPTION	DATE