

RoHS compliant

SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Brass
 Insulator Material: High Temperature Plastic
 UL94V-0

Ordering Code:

EFR01- X - X - X - X
 ① ② ③ ④ ⑤

① Series No:

② No. of Contact

- A: 03 TO 40
- B: 04 TO 80

③ Connector Type







- A: Single Row
- B: Dual Row


④ Contact Plating

- A: Gold Flash
- E: 3u" Gold
- B: 10u" Gold
- C: 15u" Gold
- D: 30u" Gold

⑤ Code Packing

- A: Tube
- B: Tray

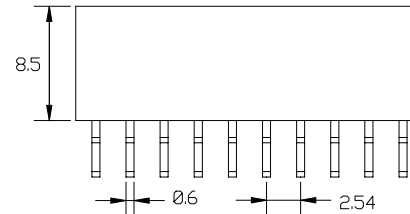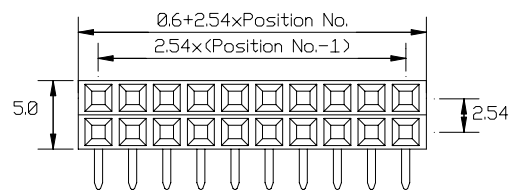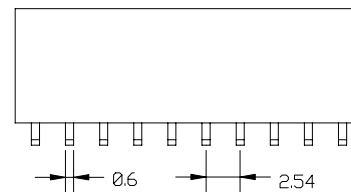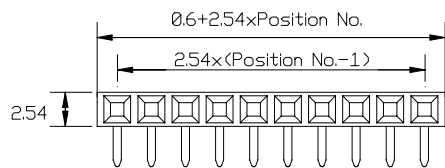

UNLESS OTHERWISE SPECIFIED TOLERANCE		 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	TITLE: 2.54mm Female Header Right Angle Type , Profile: 8.5mm DRAWN NO: EFR01-XXXX-1 PRODUCT NO. EFR01-XXXX
DRAWN		
CHECKED		
APPROVED		
REV	DESCRIPTION	DATE