

RoHS compliant

SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic
 UL94V-0











Processing

Max Processing Temp: 260 ° C for 6 seconds
 SMT Lead Coplanarity: (0.10mm).004"max (03-40)

Ordering Code:

EFS07- X - X - X - X
 ① ② ③ ④ ⑤

- ① Series No:
- ② No. of Contact 03 TO 40
- ③ Connector Type
 A: Type A
 B1: Type B1
 B2: Type B2
 C1: Type C1
 C2: Type C2
- ④ Contact Plating
 A: Gold Flash
 B: 10u" Gold
 C: 15u" Gold
 D: 30u" Gold
 T: Tin Plated
 E: 3u" Gold
- ⑤ Code Packing
 A: Tube
 B: Pad+Tube (Type C only)
 C: Pad+T&R (Type C only)

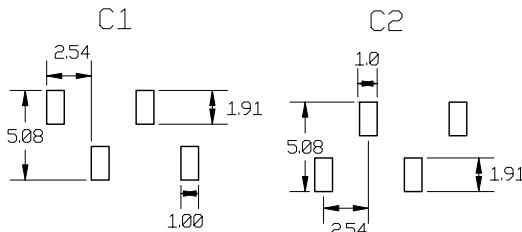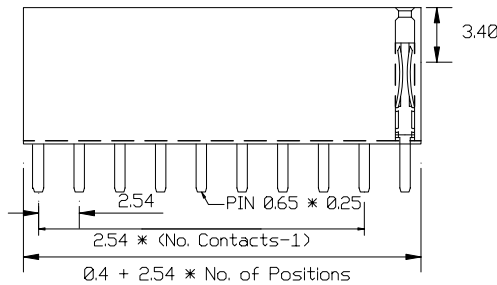

UNLESS OTHERWISE SPECIFIED TOLERANCE		 www.allconnectors.eu info@allconnectors.eu Tel: +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25
ANG. 0.0 ±0.25 0.00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	
DRAWN	CHECKED	TITLE: 254mm Female Header Single Row , Profile: 8.5mm
APPROVED	DATE	DRAWN NO: ES07-XXXX-1
REV	DESCRIPTION	PRODUCT NO. EFS07-XXXX