


## A2550H-A2H

2.54mm Pitch Crimp Flex Housing

### Reference Informations:

- \*Material: PBT30%GF, UL94V-0
- \*Suitable A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C)
- \*Mates with A2550HM, A2547HM series Housing or A2547WVA, A2547WRA series Wafer
- \*Color: Black

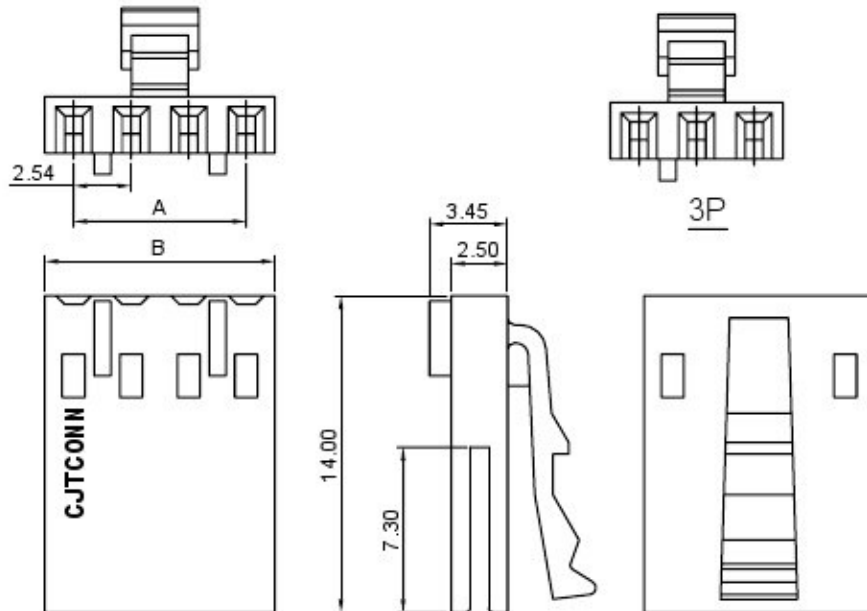

### Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A2550H-3P-A2H	5.08	7.62
A2550H-4P-A2H	7.62	10.16
A2550H-5P-A2H	10.16	12.70
A2550H-6P-A2H	12.70	15.24
A2550H-7P-A2H	15.24	17.78
A2550H-8P-A2H	17.78	20.32
A2550H-9P-A2H	20.32	22.86
A2550H-10P-A2H	22.86	25.40
A2550H-11P-A2H	25.40	27.94
A2550H-12P-A2H	27.94	30.48
A2550H-13P-A2H	30.48	33.02
A2550H-14P-A2H	33.02	35.56
A2550H-15P-A2H	35.56	38.10
A2550H-16P-A2H	38.10	40.64
A2550H-17P-A2H	40.64	43.18
A2550H-18P-A2H	43.18	45.72
A2550H-19P-A2H	45.72	48.26
A2550H-20P-A2H	48.26	50.80
A2550H-21P-A2H	50.80	53.34
A2550H-22P-A2H	53.34	55.88
A2550H-23P-A2H	55.88	58.42
A2550H-24P-A2H	58.42	60.96
A2550H-25P-A2H	60.96	63.50


Unit: mm

## A2550H-A3H

2.54mm Pitch Crimp Flex Housing

### Reference Informations:

- \*Material: PBT30%GF, UL94V-0
- \*Suitable A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C)
- \*Mates with A2550HM, A2547HM series Housing or A2547WVA, A2547WRA series Wafer
- \*Color: Black

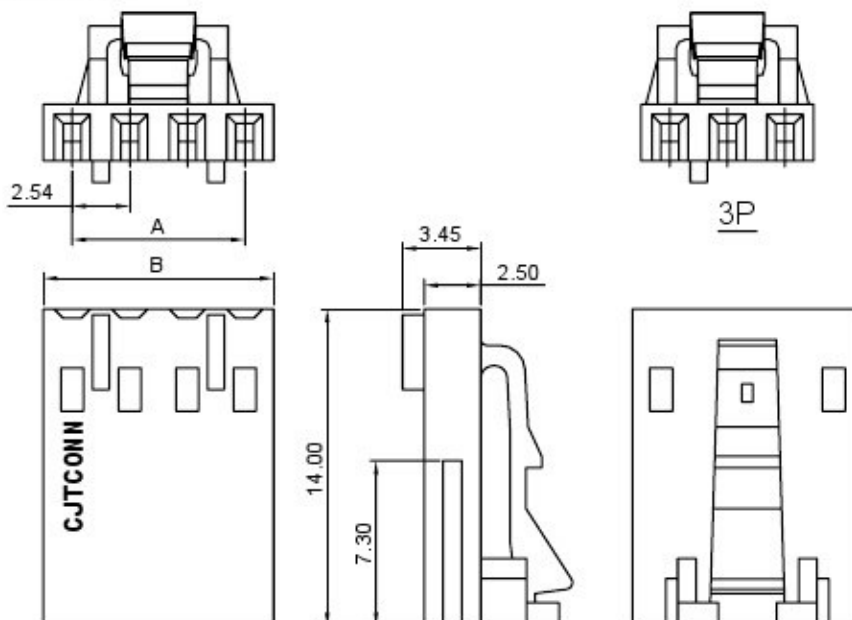

### Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A2550H-3P-A3H	5.08	7.62
A2550H-4P-A3H	7.62	10.16
A2550H-5P-A3H	10.16	12.70
A2550H-6P-A3H	12.70	15.24
A2550H-7P-A3H	15.24	17.78
A2550H-8P-A3H	17.78	20.32
A2550H-9P-A3H	20.32	22.86
A2550H-10P-A3H	22.86	25.40
A2550H-11P-A3H	25.40	27.94
A2550H-12P-A3H	27.94	30.48
A2550H-13P-A3H	30.48	33.02
A2550H-14P-A3H	33.02	35.56
A2550H-15P-A3H	35.56	38.10
A2550H-16P-A3H	38.10	40.64
A2550H-17P-A3H	40.64	43.18
A2550H-18P-A3H	43.18	45.72
A2550H-19P-A3H	45.72	48.26
A2550H-20P-A3H	48.26	50.80
A2550H-21P-A3H	50.80	53.34
A2550H-22P-A3H	53.34	55.88
A2550H-23P-A3H	55.88	58.42
A2550H-24P-A3H	58.42	60.96
A2550H-25P-A3H	60.96	63.50

Unit: mm