

A2550 SERIES

2.54mm pitch FFC Crimp Flex connector

A2550H-D

2.54mm Pitch Crimp Flex Housing


Reference Informations:

*Material: PBT30%GF, UL94V-0

*Suitable A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550M-T, A2550-T-C)

*Mates with A2541 series Wafer

*Color: Blue

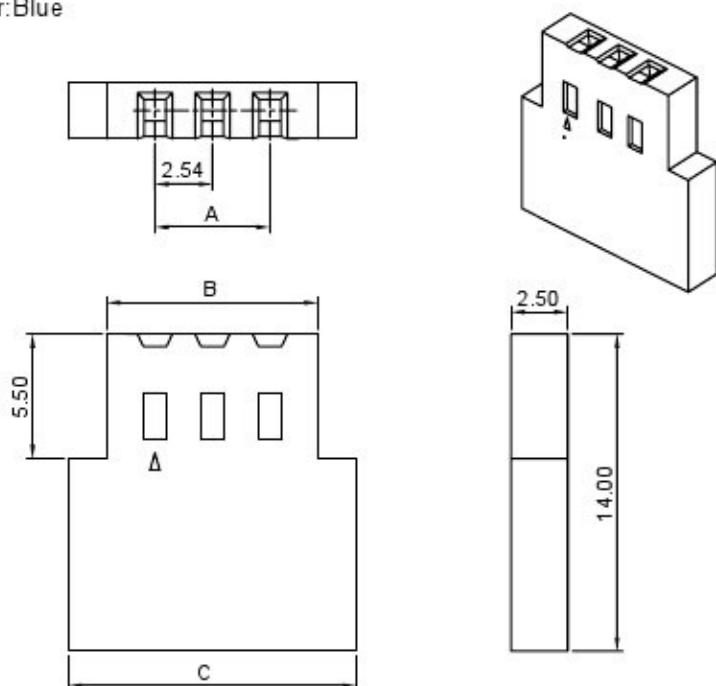

Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
A2550H-2P-D	2.54	6.81	9.86
A2550H-3P-D	5.08	9.35	12.40
A2550H-4P-D	7.62	11.89	14.94
A2550H-5P-D	10.16	14.43	17.48
A2550H-6P-D	12.70	16.97	20.02
A2550H-7P-D	15.24	19.51	22.56
A2550H-8P-D	17.78	22.05	25.10
A2550H-9P-D	20.32	24.59	27.64
A2550H-10P-D	22.86	27.13	30.18
A2550H-11P-D	25.40	29.67	32.72
A2550H-12P-D	27.94	32.21	35.26
A2550H-13P-D	30.48	34.75	37.80
A2550H-14P-D	33.02	37.29	40.34
A2550H-15P-D	35.56	39.83	42.88
A2550H-16P-D	38.10	42.37	45.42
A2550H-17P-D	40.64	44.91	47.96
A2550H-18P-D	43.18	47.45	50.50
A2550H-19P-D	45.72	49.99	53.04
A2550H-20P-D	48.26	52.53	55.58
A2550H-21P-D	50.80	55.07	58.12
A2550H-22P-D	53.34	57.61	60.66
A2550H-23P-D	55.88	60.15	63.20
A2550H-24P-D	58.42	62.69	65.74
A2550H-25P-D	60.96	65.23	68.28

Unit: mm

A2550H-G

2.54mm Pitch Crimp Flex Housing


Reference Informations:

*Material: PBT30%GF, UL94V-0

*Suitable A2550 series Terminal (A2550-T-B)

*Mates with A2541 series Wafer

*Color: Black

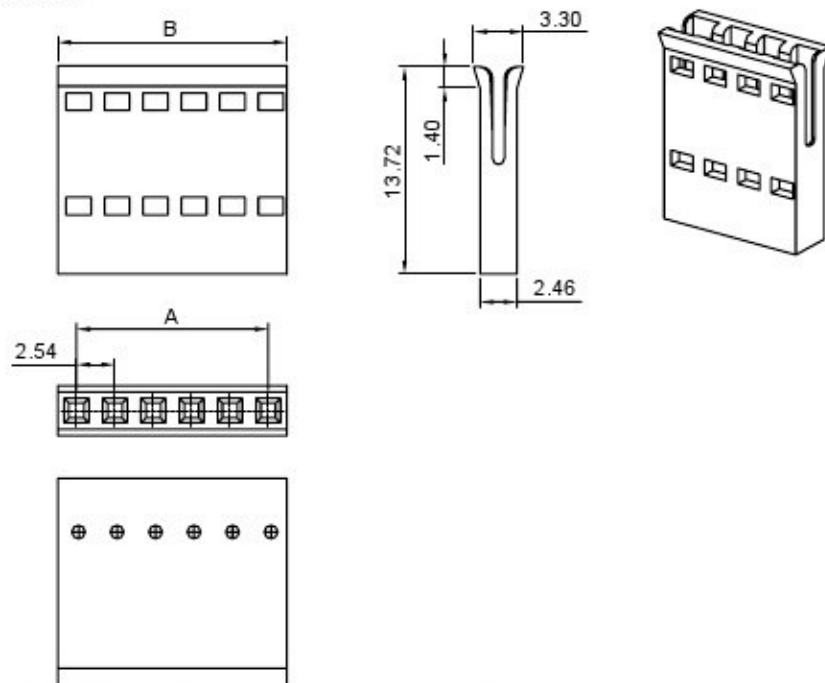

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A2550H-2P-G	2.54	4.92
A2550H-3P-G	5.08	7.46
A2550H-4P-G	7.62	10.00
A2550H-5P-G	10.16	12.54
A2550H-6P-G	12.70	15.08
A2550H-7P-G	15.24	17.62
A2550H-8P-G	17.78	20.16
A2550H-9P-G	20.32	22.70
A2550H-10P-G	22.86	25.24
A2550H-11P-G	25.40	27.78
A2550H-12P-G	27.94	30.32
A2550H-13P-G	30.48	32.86
A2550H-14P-G	33.02	35.40
A2550H-15P-G	35.56	37.94
A2550H-16P-G	38.10	40.48
A2550H-17P-G	40.64	43.02
A2550H-18P-G	43.18	45.56
A2550H-19P-G	45.72	48.10
A2550H-20P-G	48.26	50.64
A2550H-21P-G	50.80	53.18
A2550H-22P-G	53.34	55.72
A2550H-23P-G	55.88	58.26
A2550H-24P-G	58.42	60.80
A2550H-25P-G	60.96	63.34

Unit: mm