

A2550 SERIES

2.54mm pitch FFC Crimp Flex connector

A2550HH

2.54mm Pitch Crimp Flex Housing


Reference Informations:

*Material: PBT30%GF, UL94V-0

*Suitable A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C, A2550M-T)

*Mates with A2541 series Wafer

*Color: Black

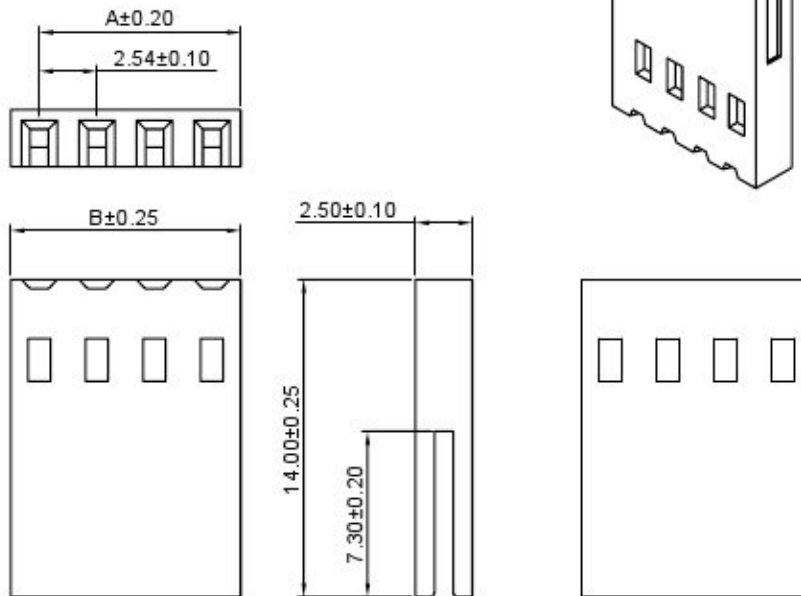

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A2550HH-2P	2.54	5.08
A2550HH-3P	5.08	7.62
A2550HH-4P	7.62	10.16
A2550HH-5P	10.16	12.70
A2550HH-6P	12.70	15.24
A2550HH-7P	15.24	17.78
A2550HH-8P	17.78	20.32
A2550HH-9P	20.32	22.86
A2550HH-10P	22.86	25.40
A2550HH-11P	25.40	27.94
A2550HH-12P	27.94	30.48
A2550HH-13P	30.48	33.02
A2550HH-14P	33.02	35.56
A2550HH-15P	35.56	38.10
A2550HH-16P	38.10	40.64
A2550HH-17P	40.64	43.18
A2550HH-18P	43.18	45.72
A2550HH-19P	45.72	48.26
A2550HH-20P	48.26	50.80
A2550HH-21P	50.80	53.34
A2550HH-22P	53.34	55.88
A2550HH-23P	55.88	58.42
A2550HH-24P	58.42	60.96
A2550HH-25P	60.96	63.50

Unit: mm

A2550HA

2.54mm Pitch Crimp Flex Housing


Reference Informations:

*Material: PBT30%GF, UL94V-0

*Suitable A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C.)

*Mates with A2549 series Single Row Wafer (A2549WVB, A2549WRB)

*Color: Black

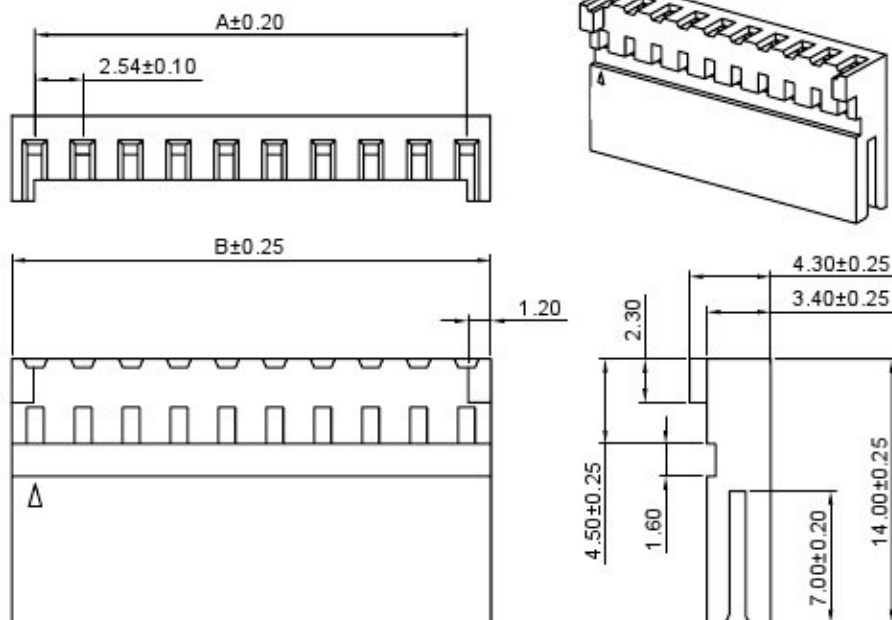

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A2550HA-2P	2.54	5.08
A2550HA-3P	5.08	7.62
A2550HA-4P	7.62	10.16
A2550HA-5P	10.16	12.70
A2550HA-6P	12.70	15.24
A2550HA-7P	15.24	17.78
A2550HA-8P	17.78	20.32
A2550HA-9P	20.32	22.86
A2550HA-10P	22.86	25.40
A2550HA-11P	25.40	27.94
A2550HA-12P	27.94	30.48
A2550HA-13P	30.48	33.02
A2550HA-14P	33.02	35.56
A2550HA-15P	35.56	38.10
A2550HA-16P	38.10	40.64
A2550HA-17P	40.64	43.18
A2550HA-18P	43.18	45.72
A2550HA-19P	45.72	48.26
A2550HA-20P	48.26	50.80
A2550HA-21P	50.80	53.34
A2550HA-22P	53.34	55.88
A2550HA-23P	55.88	58.42
A2550HA-24P	58.42	60.96
A2550HA-25P	60.96	63.50

Unit: mm

Allconnectors

www.allconnectors.de
TEL: 0049 711 7009503
70794 Eilderstadt - Germany

Info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25