



02P






03P

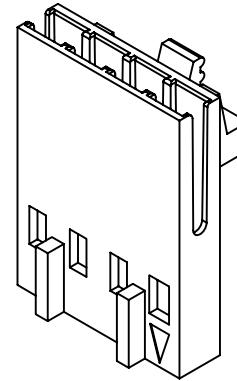

SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 500V AC/minute
 Material: PBT30%GF,UL94V-0
 Color: Natural(Black)

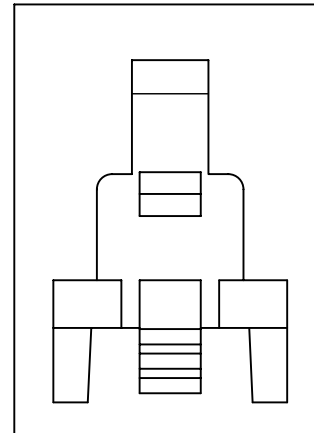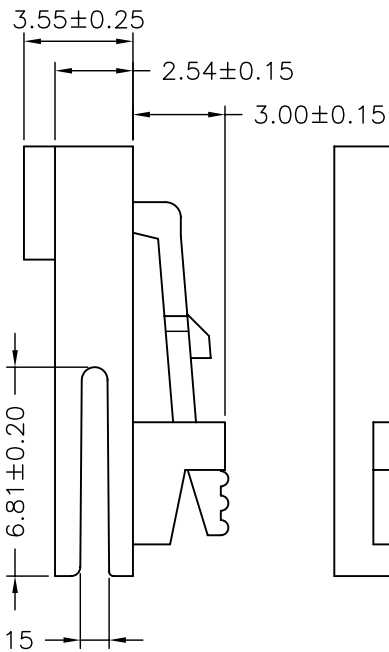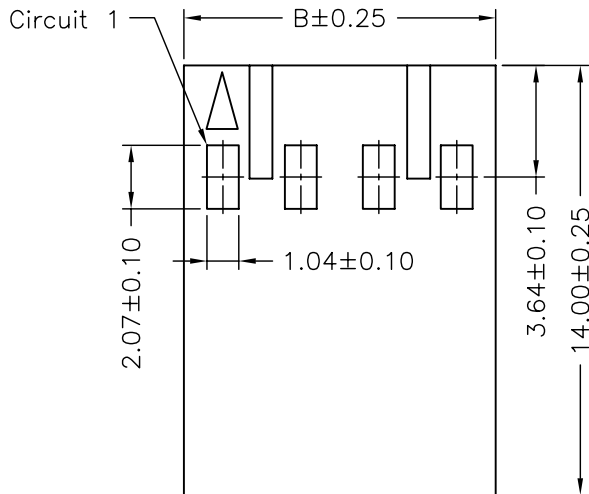

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
F2544H-02P-LB	2.54	5.08
F2544H-03P-LB	5.08	7.62
F2544H-04P-LB	7.62	10.16
F2544H-05P-LB	10.16	12.70
F2544H-06P-LB	12.70	15.24
F2544H-07P-LB	15.24	17.78
F2544H-08P-LB	17.78	20.32
F2544H-09P-LB	20.32	22.86
F2544H-10P-LB	22.86	25.40
F2544H-11P-LB	25.40	27.94
F2544H-12P-LB	27.94	30.48
F2544H-14P-LB	33.02	35.56

Allconnectors			
<small>www.allconnectors.eu info@allconnectors.eu Tel: +49 (0)711 / 358 110 20 Fax: +49 (0)711 / 358 110 25</small>			
UNIT	SCALE	SHEET	TITLE:
mm		1 of 1	2.54mm PITCH HOUSING WITH LOCK, FFC CONNECTOR, B TYPE
DRAWN BY	APPROVED BY		
蕭惠風	謝瑞清		
2004.03.16	2004.03.16		
B2	EN0911050541	2009.11.05	GENERAL TOLERANCE
B1	REVISE	2007.11.30	X.X±0.25 ANGLE±
B0	NEW RELEASE	2005.12.05	X.XX±0.15
REV.	DESCRIPTION	DATE	X.XXX±0.05
DRAW NO.:			REV.
F2544H-XP-LB			B2