


ALL CONTACTS & LATCH MUST BE COPLANAR WITHIN 0.10mm.

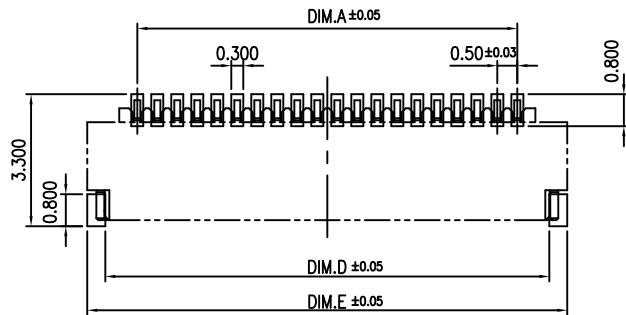

RECOMMENDED P.C. BOARD PATTERN LAYOUT
RECOMMENDED METAL MASK THICKNESS: T=0.15


SCALE 8:1

NOTES:

- UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
- MATERIAL OF COMPONENTS :
INSULATORL.C.P SERIES ,UL94 V-0.
SPACERNYLON SERIES ,UL94 V-0.
CONTACTPHOSPHOR BRONZE C5191R-H
HOLD DOWNBRASS C2680R-H
- CONTACT AREA: GOLD FLASH
NICKEL 50~150 μ" UNDER PLATING.

315A-XX B A A-R
1 2 3 4 5

- Pin count
XX: 04 to 50 pin
- Contact
B: Bottom contact
- Plating
A: G/F
- Package
A: Reel
- RoHS

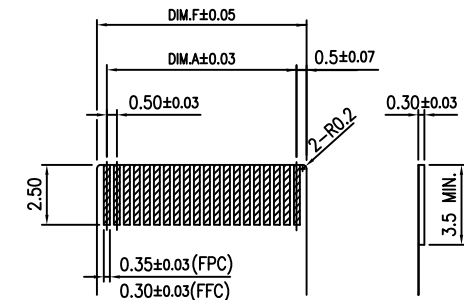

FPC/FFC LAYOUT

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±0.3
.0	±0.25
.00	±0.20

SCALE: AS SHOWN UNIT: mm

DRAWN Willis 2008/3/20

CHECKED / /

APPROVED / /

SIZE A4 REV.

Allconnectors
www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DRAWN NAME:
FPC Connector Horizontal type
Pitch 0.5mm ,Thickness 0.9 mm


PRODUCT NO. 315A-XXBAA-R

FILE NAME: 315A-XXBAA-R


REV.	DESCRIPTION	DATE	SIZE	REV.
			A4	

POS.	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	DIM.F
4	1.5	4.00	2.60	3.10	4.00	2.50
5	2.00	4.50	3.10	3.60	4.50	3.00
6	2.50	5.00	3.60	4.10	5.00	3.50
7	3.00	5.50	4.10	4.60	5.50	4.00
8	3.50	6.00	4.60	5.10	6.00	4.50
9	4.00	6.50	5.10	5.60	6.50	5.00
10	4.50	7.00	5.60	6.10	7.00	5.50
11	5.00	7.50	6.10	6.60	7.50	6.00
12	5.50	8.00	6.60	7.10	8.00	6.50
13	6.00	8.50	7.10	7.60	8.50	7.00
14	6.50	9.00	7.60	8.10	9.00	7.50
15	7.00	9.50	8.10	8.60	9.50	8.00
16	7.50	10.00	8.60	9.10	10.00	8.50
17	8.00	10.50	9.10	9.60	10.50	9.00
18	8.50	11.00	9.60	10.10	11.00	9.50
19	9.00	11.50	10.10	10.60	11.50	10.00
20	9.50	12.00	10.60	11.10	12.00	10.50
21	10.00	12.50	11.10	11.60	12.50	11.00
22	10.50	13.00	11.60	12.10	13.00	11.50
23	11.00	13.50	12.10	12.60	13.50	12.00
24	11.50	14.00	12.60	13.10	14.00	12.50
25	12.00	14.50	13.10	13.60	14.50	13.00
26	12.50	15.00	13.60	14.10	15.00	13.50
27	13.00	15.50	14.10	14.60	15.50	14.00

POS.	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	DIM.F
28	13.50	16.00	14.60	15.10	16.00	14.50
29	14.00	16.50	15.10	15.60	16.50	15.00
30	14.50	17.00	15.60	16.10	17.00	15.50
31	15.00	17.50	16.10	16.60	17.50	16.00
32	15.50	18.00	16.60	17.10	18.00	16.50
33	16.00	18.50	17.10	17.60	18.50	17.00
34	16.50	19.00	17.60	18.10	19.00	17.50
35	17.00	19.50	18.10	18.60	19.50	18.00
36	17.50	20.00	18.60	19.10	20.00	18.50
37	18.00	20.50	19.10	19.60	20.50	19.00
38	18.50	21.00	19.60	20.10	21.00	19.50
39	19.00	21.50	20.10	20.60	21.50	20.00
40	19.50	22.00	20.60	21.10	22.00	20.50
41	20.00	22.50	21.10	21.60	22.50	21.00
42	20.50	23.00	21.60	22.10	23.00	21.50
43	21.00	23.50	22.10	22.60	23.50	22.00
44	21.50	24.00	22.60	23.10	24.00	22.50
45	22.00	24.50	23.10	23.60	24.50	23.00
46	22.50	25.00	23.60	24.10	25.00	23.50
47	23.00	25.50	24.10	24.60	25.50	24.00
48	23.50	26.00	24.60	25.10	26.00	24.50
49	24.00	26.50	25.10	25.60	26.50	25.00
50	24.50	27.00	25.60	26.10	27.00	25.50

UNLESS OTHERWISE SPECIFIED TOLERANCE		 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>
ANG.	±5°	
0.	±0.3	
.0	±0.25	
.00	±0.20	
SCALE:	AS SHOWN	UNIT: mm
DRAWN	Willis	2008/3/20
CHECKED	/ /	
APPROVED	/ /	
REV.		
DRAWN NAME:		FPC Connector Horizontal type Pitch 0.5mm ,Thickness 0.9 mm
PRODUCT NO.		
FILE NAME:		315A-XXBAA-R

REV.	DESCRIPTION	DATE



SIZE A4