
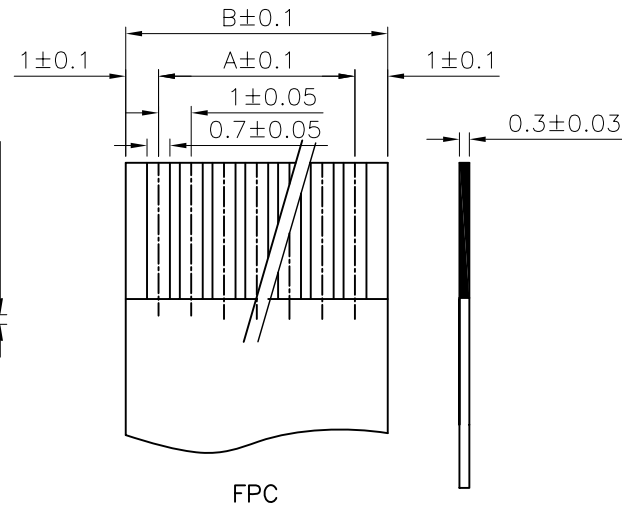



P.C.Board Layout

Electrical Characteristics:
 Current rating: 0.4A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C~+85°C
 Withstand Voltage: 200V AC/Minute
 Contact Resistance: 20m Ω
 Insulation resistance: 500m Ω
 Relative Humidity: 93%+40°C
Material Description:
 Terminal: Phosphor Bronze
 Fitting Nail: Brass
 Housing: LCP(UL94V-0)
 Slider: LCP(UL94V-0)
 All materials must meet Greennon requirement for environment protection

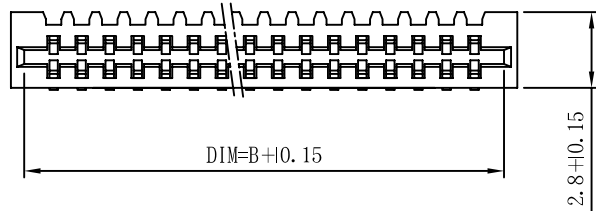



FPC

POS	DIMENSION		
	A	B	C
04	3	5.1	6
05	4	6.1	7
06	5	7.1	8
07	6	8.1	9
08	7	9.1	10
09	8	10.1	11
10	9	11.1	12
11	10	12.1	13
12	11	13.1	14
13	12	14.1	15
14	13	15.1	16
15	14	16.1	17
16	15	17.1	18
17	16	18.1	19
18	17	19.1	20
19	18	20.1	21
20	19	21.1	22
21	20	22.1	23
22	21	23.1	24
23	22	24.1	25
24	23	25.1	26
25	24	26.1	27
26	25	27.1	28
27	26	28.1	29
28	27	29.1	30
29	28	30.1	31
30	29	31.1	32
31	30	32.1	33
32	31	33.1	34
33	32	34.1	35
34	33	35.1	36
35	34	36.1	37
36	35	37.1	38
37	36	38.1	39
38	37	39.1	40
39	38	40.1	41
40	39	41.1	42

Ordering Information

FCLGS1B - X 1 X X

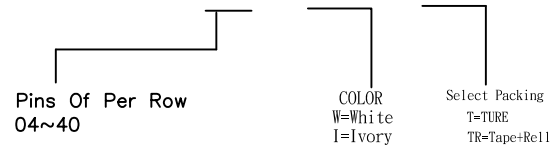

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ±0.38 .XX ±0.25 .XXX ±0.13	X. ±5° .X° ±2° .XX° ±1° .XXX° ±0.5°	Andy2009.08.12			
UNIT:mm	SCALE 1:1	APPRO.	DATE	PART NO	FCLGS1B-X1XX
A4	SHEET: 1 of 1			DRAWING NO.	FCLDS1B-01
					REV.A0