
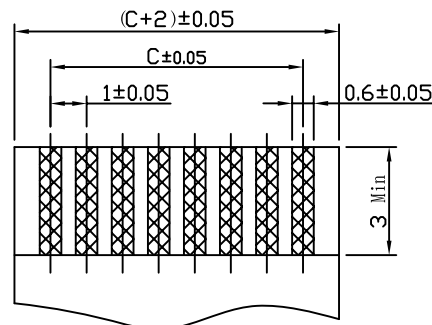
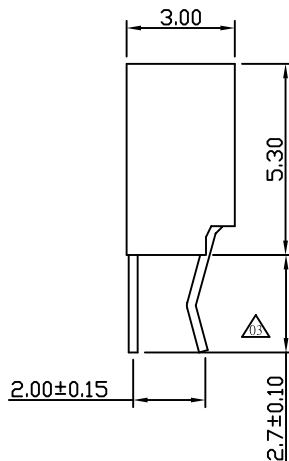


RECOMMENDED PCB LAYOUT

NOTES:

- HOUSING : NYLON 9T, UL 94V-0. NATURE WHITE
- CONTACT : PHOSPHOR BRONZE. (C5191R-H,T=0.25mm)

No. of PIN/ROW	Dimension Information		
	A	B	C
04	7.1	5.05	3.00
05	8.1	6.05	4.00
06	9.1	7.05	5.00
07	10.1	8.05	6.00
08	11.1	9.05	7.00
09	12.1	10.05	8.00
10	13.1	11.05	9.00
11	14.1	12.05	10.00
12	15.1	13.05	11.00
13	16.1	14.05	12.00
14	17.1	15.05	13.00
15	18.1	16.05	14.00
16	19.1	17.05	15.00
17	20.1	18.05	16.00
18	21.1	19.05	17.00
19	22.1	20.05	18.00
20	23.1	21.05	19.00
21	24.1	22.05	20.00
22	25.1	23.05	21.00
23	26.1	24.05	22.00
24	27.1	25.05	23.00
25	28.1	26.05	24.00
26	29.1	27.05	25.00
27	30.1	28.05	26.00
28	31.1	29.05	27.00
29	32.1	30.05	28.00
30	33.1	31.05	29.00
31	34.1	32.05	30.00
32	35.1	33.05	31.00

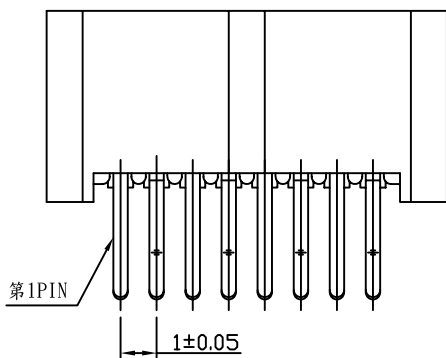

ACCOMMENDED FFC/FPC DIM. THICKNESS $0.3 \pm 0.03 \text{ mm}$



Ordering Information

FCLGS2B - X 1 X X

Pins Of Per Row
03~32

COLOR
W=White
I=Ivory

Select Packing
T=TURE
TR=Tape+Rel1

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>	
X. ± 0.38 .XX ± 0.25 .XXX ± 0.13	X' $\pm 5^\circ$.X' $\pm 2^\circ$.XX' $\pm 1^\circ$.XXX' $\pm 0.5^\circ$	Andy2009.08.12			
UNIT:mm	SCALE 1:1	APPRO.	DATE	PART NO	FCLGS2B-X1XX
A4 	SHEET: 1 of 1			DRAWING NO.	FCLGS2B-01
					REV.A0