
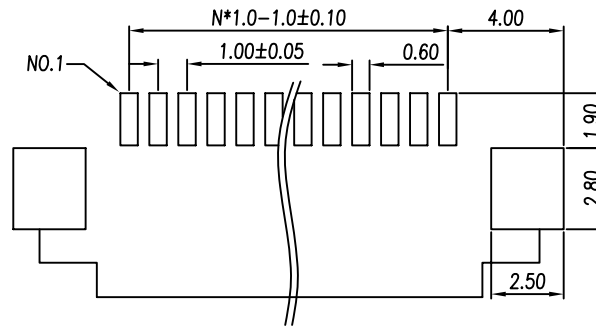
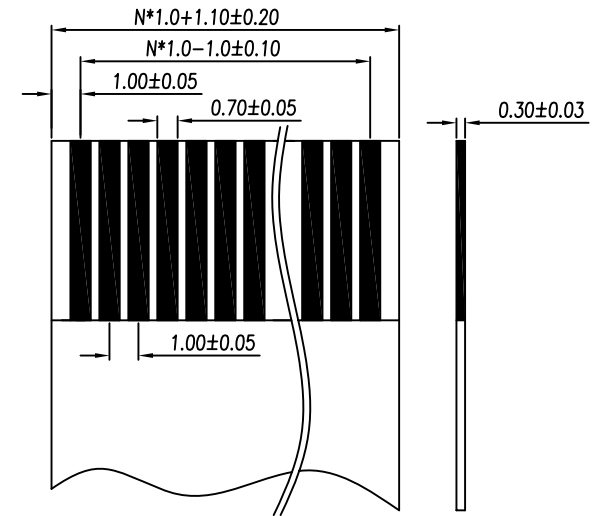
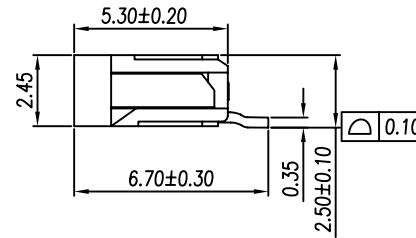


NOTE:
 1. Material:
 Housing: Heat Resistance Plastic (UL94V-0) Nylon 46
 Actuator: Heat Resistance Plastic (UL94v-0) PPS
 Contact: Copper Alloy
 All materials must be GP materials

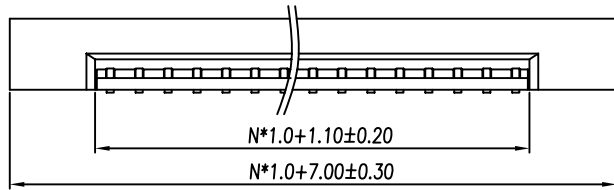


P.C.B LAYOUT

FPC Dimension Reference

Ordering Information

FCZGSHD1 - X 1 X X

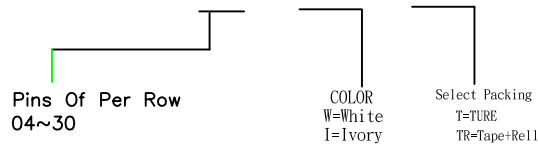

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	All Connectors	
X. ± 0.38	X' ±5°	Andy2009.	08.12	www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
.XX ±0.25	.X' ±2°	CHECK	DATE	FILE NAME	1.0mm FPC R/A SMT Downside Type
.XXX ±0.13	.XX' ±1°	APPRO.	DATE	PART NO	FCZGSHD1-X1XX
UNIT:mm	SCALE 1:1			DRAWING NO.	FCZGSHD1-01
A4	SHEET: 1 of 1				REV.A0