


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A			
B	GE11120**	图面增加贴mylar料号	12-28/11

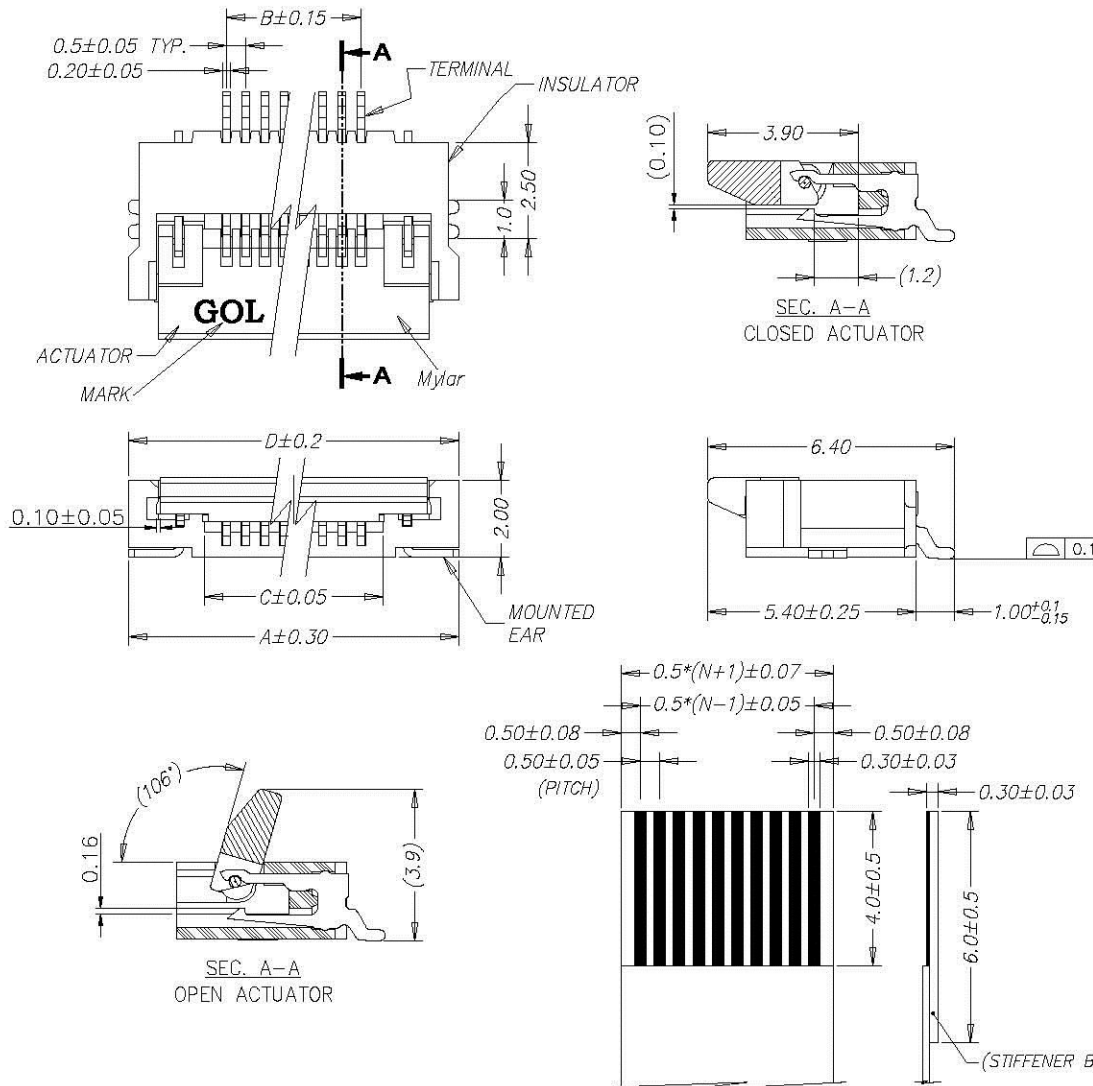

NOTES:

Insulator: LCP;UL94V-0 Rated (Color: Ivory)
 Actuator: LCP;UL94V-0 Rated (Color: Black)
 Terminal: Phosphor Bronze
 ME: Brass Plating: Tin Plated 80u" min(雾锡)
 over 30u" min nickel overall
 Terminal Plating: See ordering information

Current Rating: 0.5A AC, DC
 Voltage Rating: 75V AC Max
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 50 MΩ Min
 Withstanding Voltage: 250V AC/minute
 相邻两PIN高低PIN管控在0.05mm 以内

Ordering Information :

B 0503 F *** D M *
 1 2 3 4

- No. of circuits
- Terminal Plating :
 T= Tin plated 80u" min(雾锡) . over 30-50 u" nickel overall
 U= Gold flash over 30-50u" nickel overall
- Contact type :
 D: Lower contact
- Terminal type +packing type :
 M1: Smt type & tube packing
 M2: Smt type & tape reel
 M3: Smt type & tape reel & labelling mylar

APPLICABLE FFC
 RECOMMENDED DIMENSION

GENERAL TOLERANCE		DRAWN	zhaofan	08-20/12	SCALE	PART NO.	B0503F***DM*
X.	± 0.30	x."± 1"	CHECKED	zhangqiang	08-20/12	1/1	TITLE
X.X	± 0.25	.x "±0.1"	APPROVED	Dan	08-20/12	UNITS	mm
X.XX	± 0.20		File NO.	B050301S			成品SPEC图
X.XXX	± 0.10		REV.				
SHEET	1/2	Q'TY	1	B			

www.aiconnectors.com
 info@aiconnectors.com
 20231115-0012 232 2820502
 20231115-0012 232 2820502