

NOTES:

1. HOUSING MATERIAL: HEAT RESISTANCE PLASTIC(UL94 V-0)
ACTUATOR MATERIAL: HEAT RESISTANCE PLASTIC(UL94 V-0)
2. TERMINAL MATERIAL: PHOSPHOR BRONZE C5210R-SH.
TIN PLATING (LEAD FREE)
3. FITTING NAIL MATERIAL: PHOSPHOR BRONZE C5191R-H.
TIN PLATING (LEAD FREE)
4. TERMINAL RETENTION FORCE: 400gf (MIN)
5. FPC CABLE RETENTION FORCE: NO. OF CONTACT*30gf(MIN)

P数	A	B	C	D	E
4	6.40	5.80	2.57	1.50	6.30
5	6.90	6.30	3.07	2.00	6.80
6	7.40	6.80	3.57	2.50	7.30
7	7.90	7.30	4.07	3.00	7.80
* 8	8.40	7.80	4.57	3.50	8.30
* 9	8.90	8.30	5.07	4.00	8.80
* 10	9.40	8.80	5.57	4.50	9.30
* 11	9.90	9.30	6.07	5.00	9.80
12	10.40	9.80	6.57	5.50	10.30
13	10.90	10.30	7.07	6.00	10.80
14	11.40	10.80	7.57	6.50	11.30
15	11.90	11.30	8.07	7.00	11.80
16	12.40	11.80	8.57	7.50	12.30
17	12.90	12.30	9.07	8.00	12.80
18	13.40	12.80	9.57	8.50	13.30
19	13.90	13.30	10.07	9.00	13.80
* 20	14.40	13.80	10.57	9.50	14.30
21	14.90	14.30	11.07	10.00	14.80
22	15.40	14.80	11.57	10.50	15.30
23	15.90	15.30	12.07	11.00	15.80
* 24	16.40	15.80	12.57	11.50	16.30
* 25	16.90	16.30	13.07	12.00	16.80
26	17.40	16.80	13.57	12.50	17.30
27	17.90	17.30	14.07	13.00	17.80
28	18.40	17.80	14.57	13.50	18.30
29	18.90	18.30	15.07	14.00	18.80
* 30	19.40	18.80	15.57	14.50	19.30
* 31	19.90	19.30	16.07	15.00	19.80
* 32	20.40	19.80	16.57	15.50	20.30
33	20.90	20.30	17.07	16.00	20.80
34	21.40	20.80	17.57	16.50	21.30
35	21.90	21.30	18.07	17.00	21.80
36	22.40	21.80	18.57	17.50	22.30
37	22.90	22.30	19.07	18.00	22.80
38	23.40	22.80	19.57	18.50	23.30
39	23.90	23.30	20.07	19.00	23.80
* 40	24.40	23.80	20.57	19.50	24.30
41	24.90	24.30	21.07	20.00	24.80
42	25.40	24.80	21.57	20.50	25.30
43	25.90	25.30	22.07	21.00	25.80
* 44	26.40	25.80	22.57	21.50	26.30
* 45	26.90	26.30	23.07	22.00	26.80
46	27.40	26.80	23.57	22.50	27.30
47	27.90	27.30	24.07	23.00	27.80
48	28.40	27.80	24.57	23.50	28.30
49	28.90	28.30	25.07	24.00	28.80
* 50	29.40	28.80	25.57	24.50	29.30
* 51	29.90	29.30	26.07	25.00	29.80
52	30.40	29.80	26.57	25.50	30.30
53	30.90	30.30	27.07	26.00	30.80
* 54	31.40	30.80	27.57	26.50	31.30
55	31.90	31.30	28.07	27.00	31.80
56	32.40	31.80	28.57	27.50	32.30
57	32.90	32.30	29.07	28.00	32.80
58	33.40	32.80	29.57	28.50	33.30
59	33.90	33.30	30.07	29.00	33.80
* 60	34.40	33.80	30.57	29.50	34.30

*記號表示已開模

RoHS Compliant

Allconnectors

www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettnerstr. 25


DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

TOLERANCES ARE




X ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

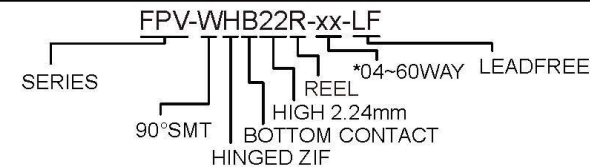

DESCRIPTION:

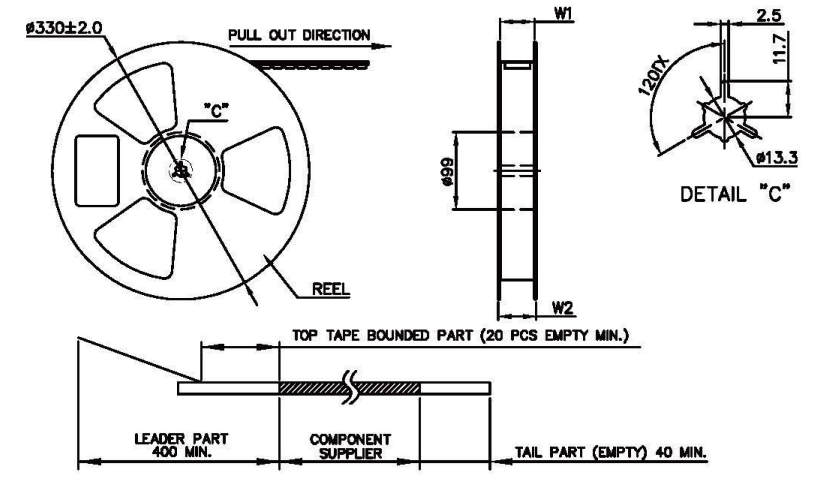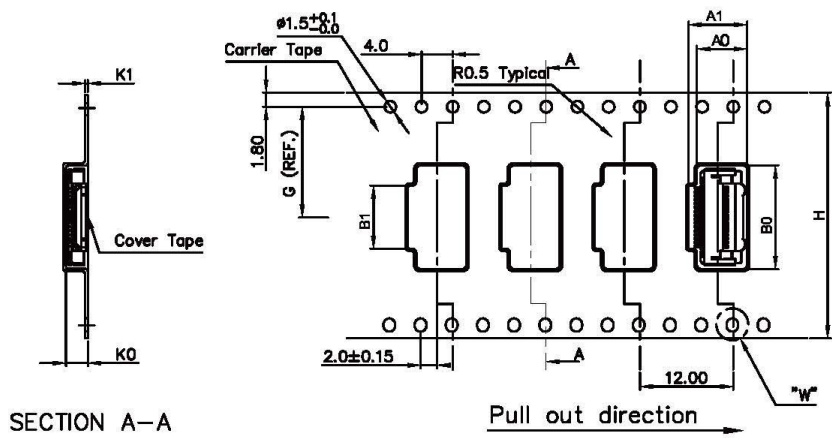

1. 产品方向与图示要求保持一致;
2. 0.5卧贴产品每盘包装数量为2000PCS;
3. 检查胶膜两边是否完全粘贴, 是否平整, 胶膜与载带贴合双边是否一致,
4. 特别注意胶膜双边不可有卷皱, 偏心现象.
5. 检查载带是否有破裂, 变形, 弯曲现象.
6. 间隔2小时测试剥离力, 剥离力大小范围80-150gf.

PIN位	A0	A1	B0	B1	K0	K1	II	W1	W2
4P			8.0	2.0					
5P			8.5	2.5					
6P			9.0	3.0					
7P			9.5	3.5					
8P			10.0	4.0					
9P			10.5	4.5					
10P			11.0	5.0			21	21.5	30
11P			11.5	5.5					
12P			12.0	6.0					
13P			12.5	6.5					
14P			13.0	7.0					
15P			13.5	7.5					
16P			14.0	8.0					
17P			14.5	8.5					
18P			15.0	9.0					
19P			15.5	9.5					
20P			16.0	10.0					
21P			16.5	10.5					
22P			17.0	11.0					
23P			17.5	11.5			32	32.5	38
24P			18.0	12.0					
25P			18.5	12.5					
26P			19.0	13.0					
27P			19.5	13.5					
28P	5.7	6.5	20.0	14.0	2.8	0.35			
29P			20.5	14.5					
30P			21.0	15.0					
31P			21.5	15.5					
32P			22.0	16.0					
33P			22.5	16.5					
34P			23.0	17.0					
35P			23.5	17.5					
36P			24.0	18.0					
37P			24.5	18.5					
38P			25.0	19.0					
39P			25.5	19.5			44	44.5	50
40P			26.0	20.0					
41P			26.5	20.5					
42P			27.0	21.0					
43P			27.5	21.5					
44P			28.0	22.0					
45P			28.5	22.5					
46P			29.0	23.0					
47P			29.5	23.5					
48P			30.0	24.0					
49P			30.5	24.5					
50P			31.0	25.0					
54P			33.0	27.0		0.40	56	56.5	62
60P			36.0	30.0					

Allconnectors
 www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettenerstr. 25

RoHS Compliant

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/ mm SCALE 1:1
 DATE
 SIZE A4 PROJECTION

TOLERANCES ARE
 X ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

FPV-WHB22R-xx-LF

SERIES REEL *04-60WAY LEADFREE
 90°SMT HIGH 2.24mm
 BOTTOM CONTACT HINGED ZIF

DESCRIPTION: