
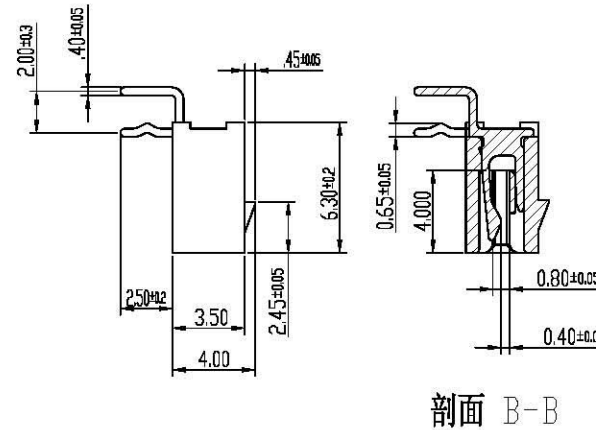


REV	ECN.NO.	MODIFY.CONTENT	DATE
A		新发行	Nov-20-08
B	GE10030MM	变更PCB layout孔径尺寸	Jun-03-10
C	GE13070MM	图面增加0.3mm凸台，材料变为LCP	Jul-29-13

Note:

- Insulator material is high temper LCP UL 94V-0
Color: black
- Terminal material is phosphor bronze.
- Plating: Brass Tin plating 100~200u", Nickel plating 30~100u".
- Operating Voltage: 50V AC/DC Max.
Current Rating: 1 Amp Max.
Contact Resistance: 30mΩ Max
Insulator Resistance: 500MΩ Min
Dielectric withstanding Voltage: 500V AC RMS
Operating Temperature: -20°~+85°

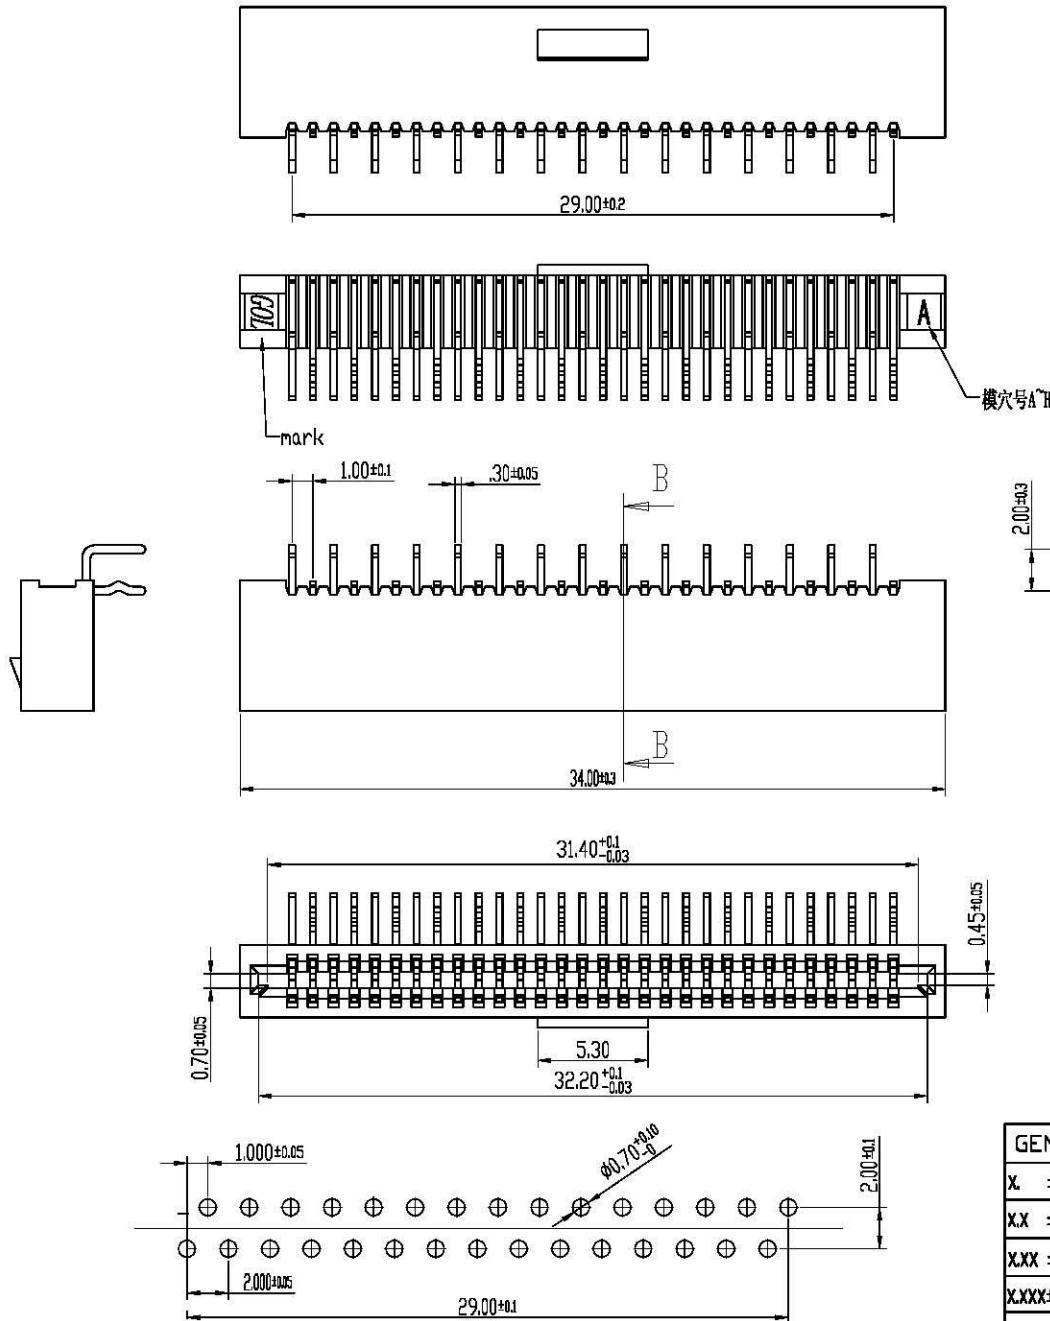

GENERAL TOLERANCE		DRAWN	xiaohui.song	Jul-29-13	SCALE	PART NO.	B1002F30TDHC
X ±	X, ± 1°	CHECKED	qlang.zhang	Jul-29-13	1/1	TITLE	1.0 pitch FPC
X.X ±0.30	.X °±0.1°	APPROVED	zhigang.he	Jul-29-13	UNITS	MM	成品SPEC图
XXX ±0.25		File NO.	B100204S				
XXX±0.10		REV.					
SHEET	1/1	QTY	1	C	<small>www.allconnectors.de info@allconnectors.de</small> <small>140001500127130 20130626</small> <small>20130626 1306261500127130 1306261500127130</small>		