

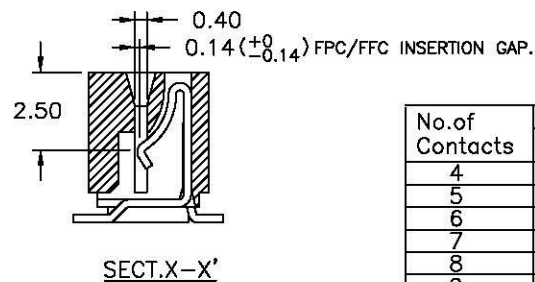



FPA-VLAL50-xx-LF
LEADFREE
RoHS Compliant


NOTE:
1.MATERIAL:
HOUSING:THERMOPLASTIC
CONTACTS:COPPER ALLOY
2.PLATING:
CONTACTS:SEE ORDERING INFORMATION
3.RATING:
OPERATING VOLTAGE:50V
CURRENT RATING:0.5A
OPERATING TEMPERATURE:-55°C ~ +85°C

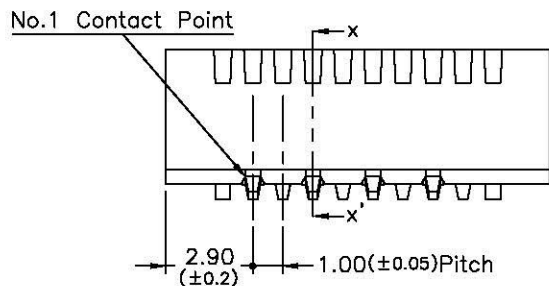

PCB Layout

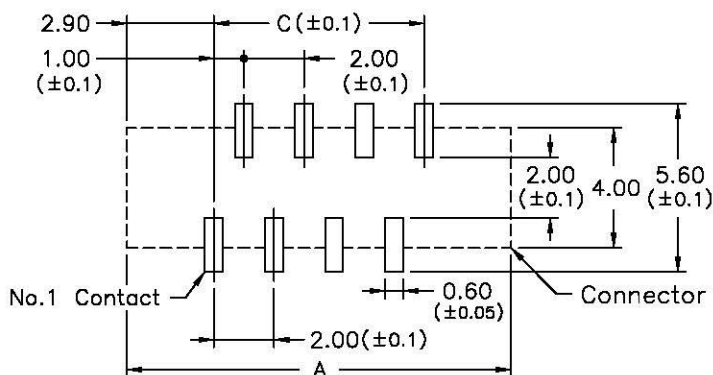

Applicable FPC

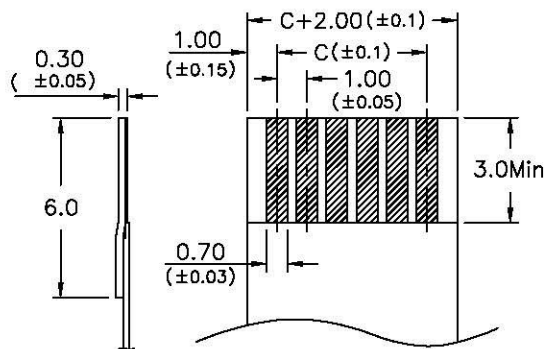

No. of Contacts	Dimensions		
	A	B	C
4	8.80	5.20	3.00
5	9.80	6.20	4.00
6	10.80	7.20	5.00
7	11.80	8.20	6.00
8	12.80	9.20	7.00
9	13.80	10.20	8.00
10	14.80	11.20	9.00
11	15.80	12.20	10.00
12	16.80	13.20	11.00
13	17.80	14.20	12.00
14	18.80	15.20	13.00
15	19.80	16.20	14.00
16	20.80	17.20	15.00
17	21.80	18.20	16.00
18	22.80	19.20	17.00
19	23.80	20.20	18.00
20	24.80	21.20	19.00
21	25.80	22.20	20.00
22	26.80	23.20	21.00
23	27.80	24.20	22.00
24	28.80	25.20	23.00
25	29.80	26.20	24.00
26	30.80	27.20	25.00
27	31.80	28.20	26.00
28	32.80	29.20	27.00
29	33.80	30.20	28.00
30	34.80	31.20	29.00
31	35.80	32.20	30.00
32	36.80	33.20	31.00

Allconnectors

www.allconnectors.de
Tel.: 0019 711 700598
70754 Filderstadt - Germany

Info@allconnectors.de
Fax: 0019 711 7093504
Kettnerstr. 25

PART NO. FPA-VLAL50-xx

DWG NO. FPA-VLAL50-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE