

FPC/FFC Connector 1.0mm Press C Type H=2.0mm









SPECIFICATIONS

Current Rating: 0.5A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 250V AC/minute
 Contacts: Phosphor Bronze/Tin-plated
 Solder Tabs: Phosphor Bronze/Tin-plated
 Housing: Nylon 6T,UL94V-0,Natural(Beige)
 Cover: Nylon 6T,UL94V-0,Natural(Black)

FPA-WHB-xx-LF
 LEADFREE
 RoHS Compliant

Ordering Information & Dimensions

PART NO.	Dimensions				
	A	B	C	D	E
FPA-WHB-05	4.00	9.90	6.10	4.70	
FPA-WHB-06	5.00	10.90	7.10	4.70	
FPA-WHB-07	6.00	11.90	8.10	5.20	
FPA-WHB-16	15.00	20.90	17.10	5.20	8.50
FPA-WHB-22	21.00	26.90	23.10	5.20	14.50
FPA-WHB-25	24.00	29.90	26.10	5.20	6.50

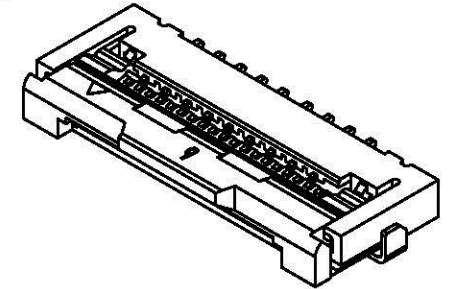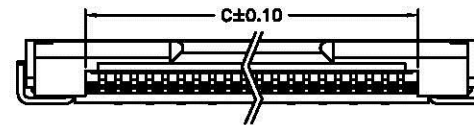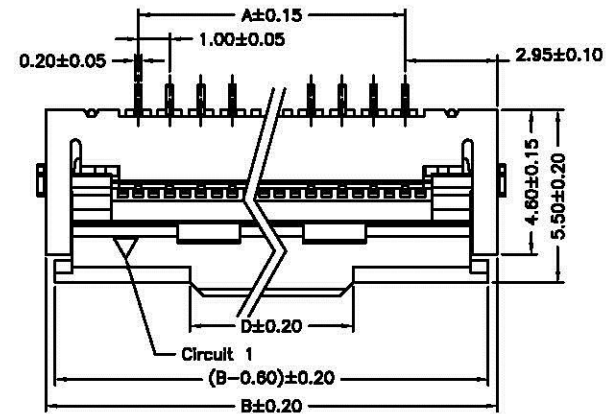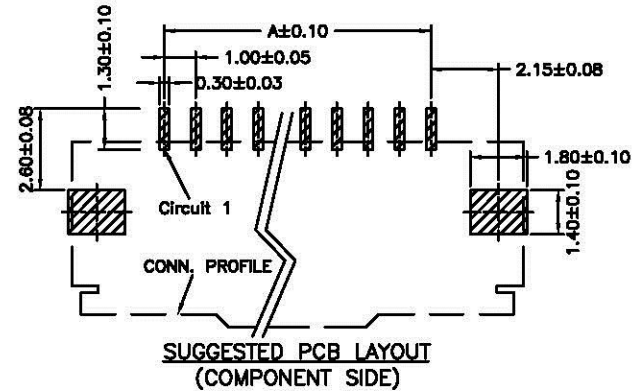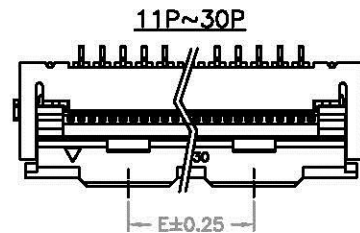

All connectors

www.allconnectors.de
 Tel.: 0049 711 700503
 70791 Filderstadt - Germany

info@allconnectors.de
 Fax: 0049 711 700504
 Kellernstr. 25

PART NO. FPA-WHB-xx

DWG NO. FPA-WHB-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

FPC/FFC Connector 1.0mm
 Press C Type H=2.0mm

AREA

REVISIONS

HK

DATE