

RECOMMENDED PCB LAYOUT

■ MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC.  
CONTACT: PHOSPHOR BRONZE.  
PLATING: TIN PLATED OVER NICKEL.

■ SPECIFICATION

VOLTAGE RATING: 250 VAC RMS.  
CURRENT RATING: 1 AMP.  
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC RMS 60 Hz.  
FOR 1 MINUTE.  
INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 500 VDC.  
CONTACT RESISTANCE: 25 MILLIOHMS MAX.  
DURABILITY: 20 CYCLES.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -40°C TO +105°C.

Circuit	Dimension			Circuit	Dimension		
	A	B	C		A	B	C
2	2.54	8.43	10.54	15	35.56	41.45	43.56
3	5.08	10.97	13.08	16	38.10	43.99	46.10
4	7.62	13.51	15.62	17	40.64	46.53	48.64
5	10.16	16.05	18.16	18	43.18	49.07	51.18
6	12.70	18.59	20.70	19	45.72	51.60	53.72
7	15.24	21.13	23.24	20	48.26	54.15	56.26
8	17.78	23.67	25.78	21	50.80	56.69	58.80
9	20.32	26.21	28.32	22	53.34	59.23	61.34
10	22.86	28.75	30.86	23	55.88	61.77	63.88
11	25.40	31.29	33.40	24	58.42	64.31	66.42
12	27.94	33.83	35.94	25	60.96	66.85	68.96
13	30.48	36.37	38.48	26	63.50	69.39	71.50
14	33.02	38.91	41.02	27	66.04	71.93	74.04


**All Connectors**

**RoHS Compliant**


DRAWING BY CY  
CHECKED BY GENIUS  
UNIT/mm SCALE 1:1  
DATE  
SIZE A4 PROJECTION

TOLERANCES ARE

X ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

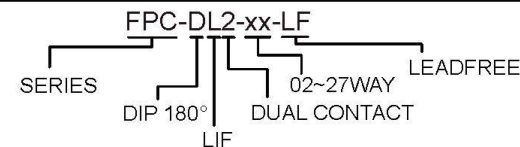

DESCRIPTION:

www.allconnectors.de info@allconnectors.de  
Tel.: 0049 711 7009503 Fax: 0049 711 7009504  
70794 Filderstadt - Germany Kettenerstr. 25