


- NOTES:
- 1.ALL DIMENSION ARE IN mm.
 - 2.MATERIAL:
HOUSING:THERMOPLASTIC(94V-0) COLOR: GRAY
CONTACT:COPPER ALLOY
 - 3.FINISH:
CONTACT SURFACE: GOLD PLATING;
PRESSING END: MATTE TIN PLATING.
 - 4.ENGAGING AND SEPARATING FORCES PER IEC 61076-4-101.
 - 5.ROHS DIRECTIVE COMPLIANCE.
 - 6.MAX SOLDERING TEMPERATURE 225 °C .
 - 7.PERFORMANCE CHARACTERISTICS
INSULATION RESISTANCE:10,000 MEGOHMS MINIMUM
DIELECTRIC WITHSTANDING VOLTAGE(AT SEA LEVEL):750 Vrms
CURRENT RATING:1 AMP AT 70 °C,FULLY LOADED
1.5 AMP AT 20 °C,FULLY LOADED
OPERATING TEMPERATURE RANGE:-55°C TO +125°C
CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM

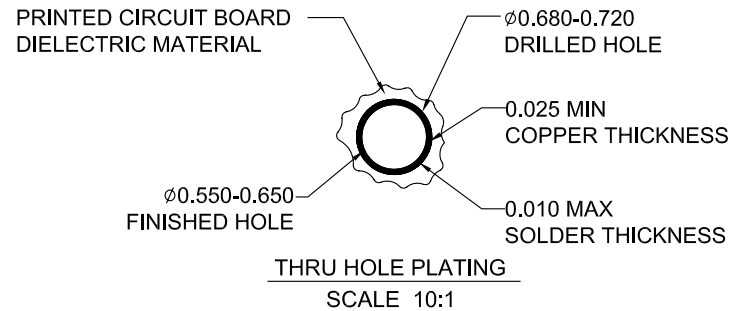

DESIGN UNITS ■ mm □ INCH		NAME: 2MM 180° SOCKET DE TYPE NO SHIELD		Allconnectors	
GENERAL TOLERANCES: (UNLESS SPECIFIED)		PART NO: NX7DEAB01A0AF		TITLE: CUSTOMER DWG C	
		APPD: 蘇侯安 8/22'06		DWG. NO: C-NX7DEAB01A0AF	
		CHKD: 楊海文 8/22'06			
		DRAWN: 蔡友華 8/22'06			
				SCALE: SHEET: REV.:	
				1/1 2/2 X1	

X1	Release	8/22'06	蔡友華	蘇侯安
REV.	ECN. NO.	DESCRIPTION	DATE	DRAWN APPD