

**NOTES:**

1 THIS CONNECTOR IS DESIGNED TO MEET THE APPLICABLE PERFORMANCE REQUIREMENTS OF IEC 61076-4-101 AND BELLCORE GR-1217-CORE

2 RoHS DIRECTIVE COMPLIANCE,  
MAX SOLDERING TEMPERATURE 225°C.

**MATERIALS**


- ① Insulators — Thermoplastic Polyester, glass filled  
Rated UL 94V-0, Color: Gray
- ② Pin contacts — Copper Alloy  
Finish: Mating Zone=Gold  
Compliant Zone=Matte Tin  
Performance Class 2= 250 cycles

**PERFORMANCE CHARACTERISTICS**


Insulation resistance — 10,000 megohms minimum  
Dielectric withstanding voltage (at sea level) — 750 Vrms  
Current rating — 1 amp @70°C, fully loaded  
1.5 amp @20°C, fully loaded  
Operating temperature range — -55°C to +125°C  
Contact resistance — 20 milliohms maximum

**COMPLIANT CONTACT**

Max.Insertion Force (per contact) — 22.5 lbs./100 N  
Min. Retention force (per contact) — 4.5 lbs./20 N



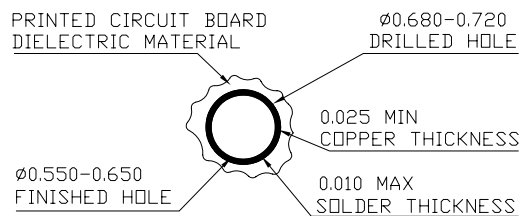


THRU HOLE PLATING  
SCALE 20:1

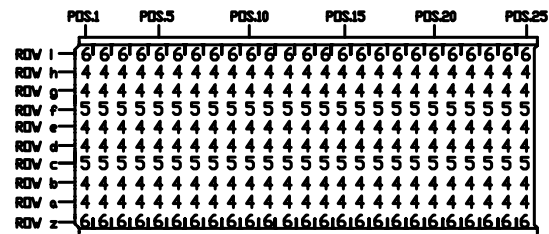


PIN CODE	MATING LENGTH OF CONTACTS	CONTACT TAIL LENGTHS
	M	L
4	.209/5.30	.146/3.70
5	.268/6.80	.146/3.70
6	.329/8.35	.146/3.70

**SELECTIVE LOADING PATTERN**

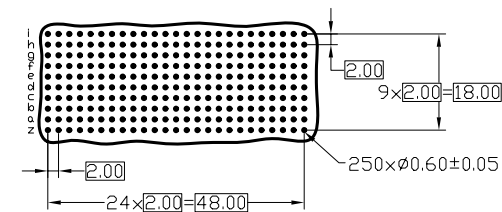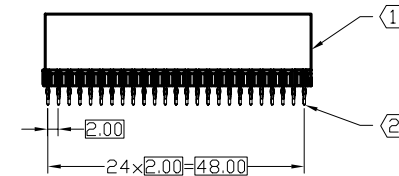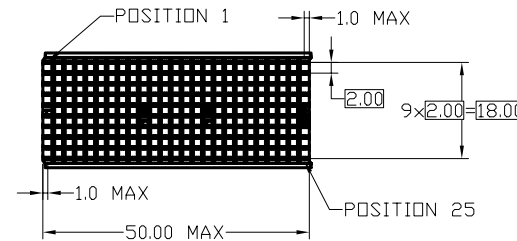

RECOMMENDED PC BOARD REQUIREMENTS  
(COMPONENT SIDE BOARD SHOWN)

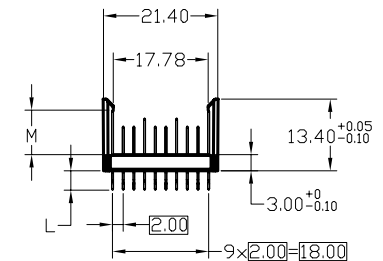

DESIGN UNITS <input type="checkbox"/> mm <input type="checkbox"/> INCH	NAME: 2MM HEADER E TYPE	<b>All connectors</b>	
GENERAL TOLERANCES: (UNLESS SPECIFIED)	PART NO: NX5E0AJ14X01PA	TITLE: CUSTOMER DWG.	C
4 PLACE ±.*** ±.***	APPD: 蘇侯安 4/28'05	DWG. NO: C-NX5E0AJ14X01PA	
3 PLACE ±0.08 ±.***	CHKD: 楊海文 4/28'05	SCALE: SHEET: REV.:	
2 PLACE ±0.15 ±.***	DRAWN: 畢杏子 4/26'05	1 / 1	1 / 1
1 PLACE ±0.20 ±.***			A
ANGULAR: X°±.*** X°±.***			

A	***	新版發行	4/28'05	Seawen	Alan
REV.	ECN. NO.	DESCRIPTION	DATE	DRAWN	APPD