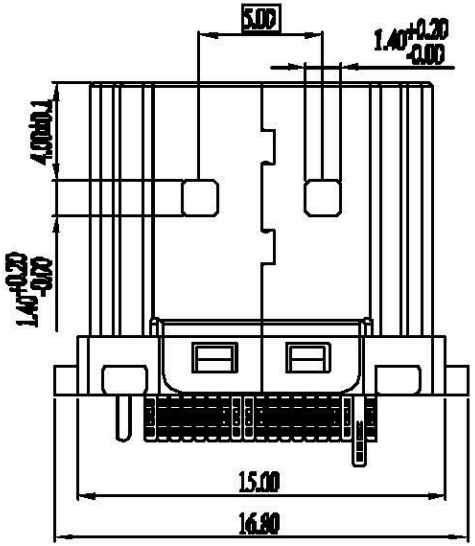

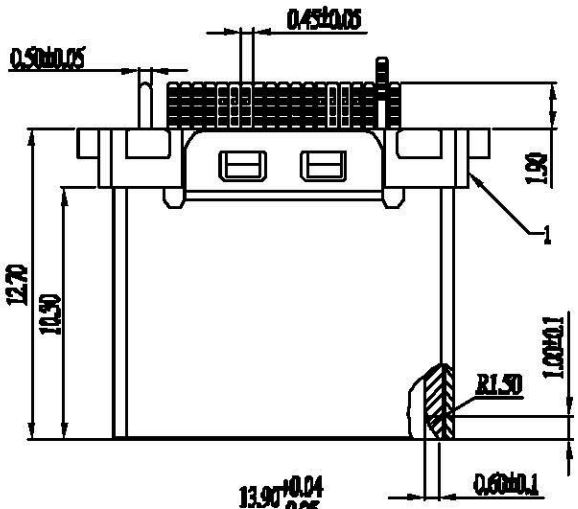

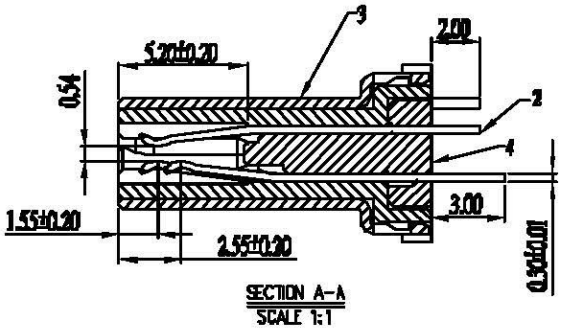

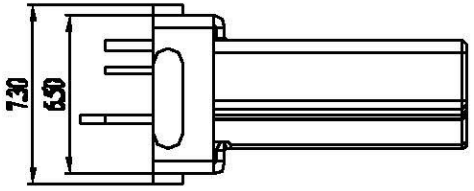

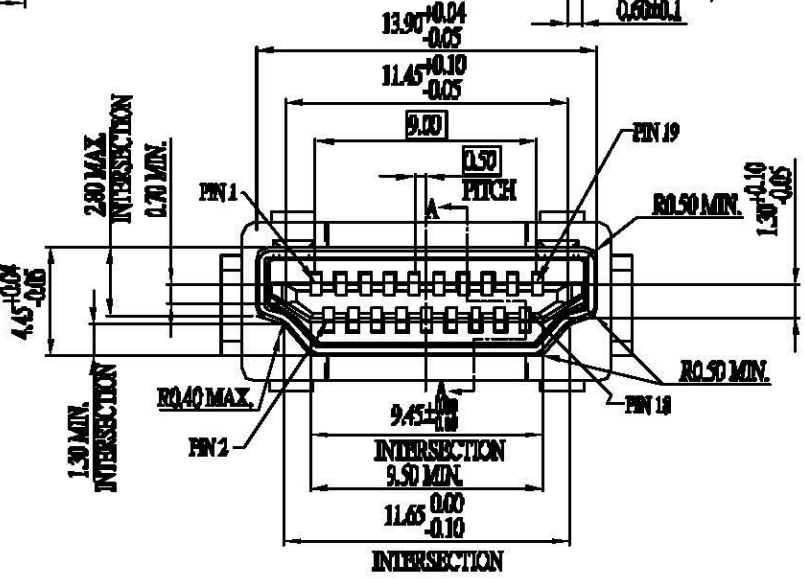

NOTES:

1: Material:
- 1.1 Housing: Thermoplastic UL94V-0 color: balck.
- 1.2 Contact: Phosphor bronze T=0.30mm.
- 1.3 Shell: Copper alloy T=0.40mm.
- 1.4 Spacer: Thermoplastic UL94V-0 color: back.

2: Specification:
- 2.1 Current rating: 0.5 A Max.
- 2.2 Voltage rating: 40 V AC(rms) Max.
- 2.3 Contact resistance: 50 mW Max.
- 2.4 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.5 Insulation resistance: 1000 MW Min.
- 2.6 Operation temperature range: -25℃~85℃

RoHS Compliant

AllConnectors
www.allconnectors.de
Tel.: 0049 711 7009309
70794 Filderstadt - Germany
Info@allconnectors.de
Fax: 0049 711 7009504
Kettemerstr. 25

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

HDMI-PE-19-LF
- SERIES
- EDGE CLIP
- MALE
- 19 WAY
- LEADFREE

DESCRIPTION: HDMI-19P 夾板