
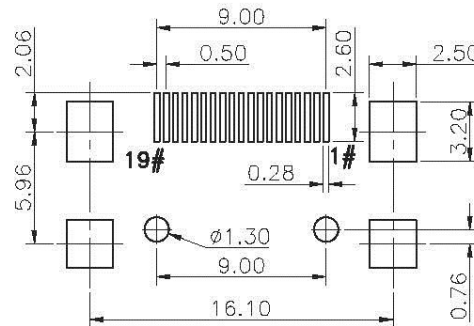



SECTION:A-A

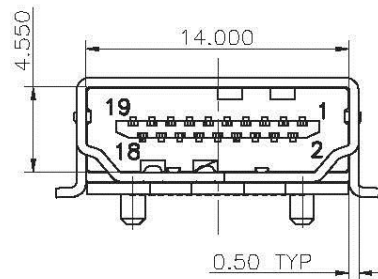

RECOMMENDED P.C BOARD LAYOUT

NOTES:
 SPECIFICATION:
 CONTACT CURRENT RATING: 0.5 AMPERES.
 DIELECTRIC WITHSTANDING VOLTAGE: AC 300V R.M.S.
 INSULATION RESISTANCE: 100MΩ MIN.
 CONTACT RESISTANCE: 30 mΩ MAX.
 ENVIRONMENTAL:
 OPERATING TEMPERATURE: -20°C~+85°C.
 MATERIAL:
 INSULATOR: HI-TEMP PLASTIC UL 94V-0.
 CONTACT: COPPER ALLOY T=0.20mm.
 SHELL: COPPER ALLOY T=0.50mm.

HDMI-SWEE-19-LF
 LEADFREE
 RoHS Compliant



UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.2

All Connectors

www.allconnectors.de
 TEL.: 0049 711 7002501
 70794 Filderstadt - Germany

info@allconnectors.de
 FAX: 0049 711 7002504
 Kettelerstr. 25

PART NO. HDMI-SWEE-19

DWG NO. HDMI-SWEE-19

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X±0.2
 .XX±
 .XXX±
 AWG

DESCRIPTION:

HDMI SMT 19PIN FEMALE

AREA

REVISIONS

HK

DATE