


Item No. 料号	螺栓规格		mm/inch主要尺寸		
	Stud Size	d2±0.2	W±0.3	F±0.3	L±1.0
311032FNMT	#4	3.2(.125)	5.7(.224)	5.0(.197)	18.5(.728)
311037SFNMT	#6	3.7(.146)	5.7(.224)	5.0(.197)	18.5(.728)
311037MFNMT	#6	3.7(.146)	6.6(.260)	6.3(.248)	20.0(.787)
311037LFNMT	#6	3.7(.146)	8.0(.315)	7.0(.276)	21.5(.846)
311043SFNMT	#8	4.3(.169)	6.6(.260)	6.3(.248)	19.5(.767)
311043LFNMT	#8	4.3(.169)	8.0(.315)	7.0(.276)	21.5(.846)
311053SFNMT	#10	5.3(.209)	8.0(.315)	7.0(.276)	21.5(.846)
311053LFNMT	#10	5.3(.209)	9.8(.386)	8.0(.315)	23.0(.906)
311064SFNMT	1/4	6.4(.252)	9.8(.386)	8.0(.315)	23.5(.925)
311064LFNMT	1/4	6.4(.252)	11.6(.457)	11.0(.433)	27.5(1.083)
311084FNMT	5/16	8.4(.331)	11.6(.457)	11.0(.433)	27.5(1.083)
311010FNMT	3/8	10.5(.413)	13.6(.535)	14.0(.551)	31.5(1.240)

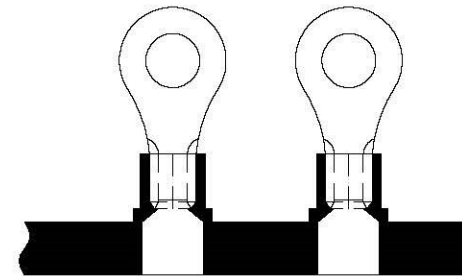

连打型

备注:

1. 适用电线 (Wire Range): 22-16AWG (0.5-1.5mm²)
2. 耐用电压、电流、温度 (Max Voltage Electricity Temperature): 600V 19A 105°C
3. 端子材质 (Terminal Body): 紫铜 (Copper)
4. 护套材质 (Insulation): 尼龙PA66 94V-2/红色 (Red)
5. 表面处理 (Plating): 镀锡 (Tin)

		品名 PROJ. NO.	Ring Terminals-Nylon Insulated		
		图号 TITLE			
www.allconnectors.de Tel.: 0049 711 7009503 40794 Hilderstadt Germany	info@allconnectors.de Fax: 0049 711 7009504 Kellernstr. 25	角法PROJ.		版本REV	00
制图Drawing:	苏海锋	比例SCALE		单位UNIT	MM
核准Verify:	苏海锋	日期DATE	2014.04.11	页数SHEET	1/1