

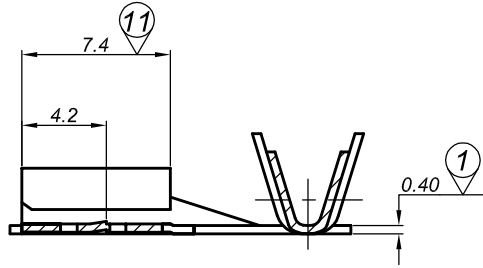


1	* Note added.	21.12.2009


Section D-D

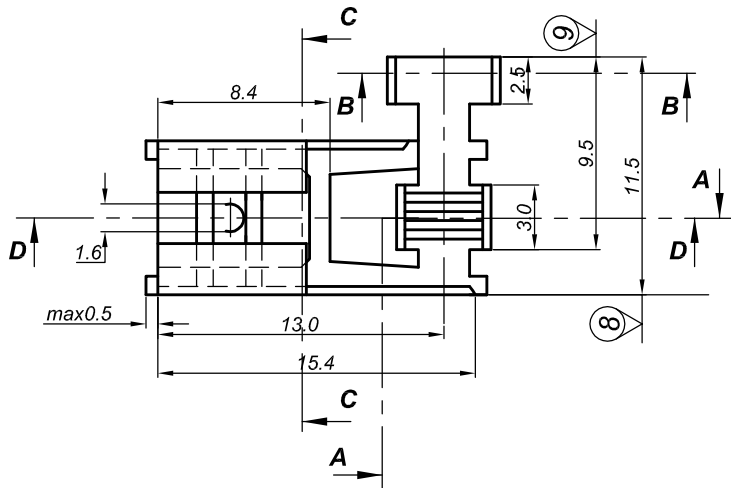



Section A-A




Section B-B



Section C-C



CABLE CROSS SECTION: 1-2.5 mm²
SOURCE STANDARD: DIN 46346 FA



①* :For H7 ve H1 connectors min.3.20 max.3.30

NOTE: FOR CODES OF COATED PRODUCTS PLEASE LOOK IN THE CHARACTERISTICS NO:S05.017.

NO	MEASUREMENT DEVICE	MAX. VALUE	MIN. VALUE
1	MICROMETER	0.45	0.35
2	CALIPER	6.90	6.50
* 3	CALIPER ①	* 3.50	* 2.70
4	CALIPER	4.50	3.50
5	CALIPER	6.00	5.00
6	CALIPER	4.30	3.30
7	CALIPER	5.50	4.50
8	CALIPER	12.00	11.00
9	CALIPER	9.90	9.10
10	FEELER BLADE	0.60	0.50
11	CALIPER	7.90	7.40
12	CALIPER	0.57	0.53

DISTRIBUTION

PART CODE	MATERIAL	STANDARD	COATING THICKNESS			
			Sn	Ag	Ni	
01 () 02 () 03 () 04 () 08 () 09 () 10 ()	0100104012 0300104012 0500104012	CuZn30 CuSn6 DC	TS EN 1652 TS EN 1652 TS EN 10139	- - -	- - -	- - -
DRAWN BY	F.KARA	SIGNATURE	DATE	25.04.1999	Part Code No	
CONFIRMATION	Ü.ALTUNTAŞ	SIGNATURE	DATE	25.04.1999	Drawing No	

Part Code No	0100104012
Drawing No	5.10.0.1.04.012

PLEASE DO NOT MEASURE THE DIMENSIONS FROM THE DRAWING.