



FUSE HOLDER FOR 5.2x20 mm FUSE

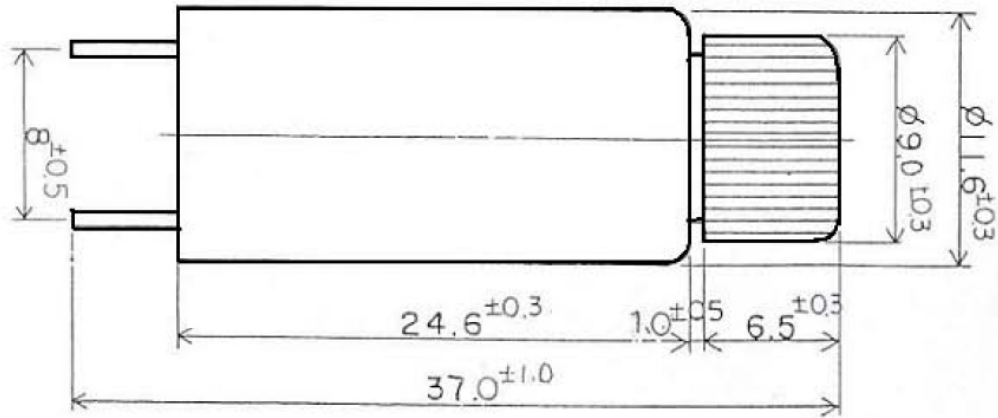

Specification :

- A > Rated Current : 10A 250V
- B > Insulation Resistance At 500V DC : 100MΩ MIN.
- C > Contact Resistance : 5mΩ At 1A DC
- D > Dielectric Strength For 60 Second : AC 1000V MIN.
- E > Bayonet Knob
- F > Approvals : UR

FSH-U-5X20-LF
LEADFREE
RoHS Compliant



PART NO. FSH-U-5X20		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
DWG NO. FSH-U-5X20							
FILE NO.		PROJECTION	AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1						

煜倫股份有限公司