



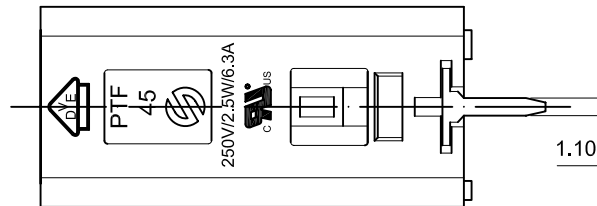

Recommend mounting holes

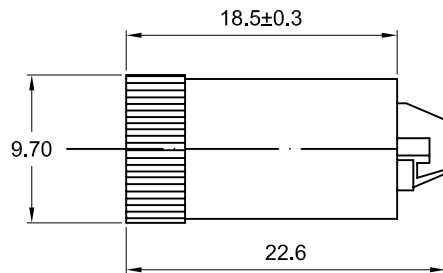

FSH-U10-5X20-LF  
LEADFREE  
RoHS Compliant

FUSE HOLDER PANEL MOUNT TYPE FOR FUSES

5.2X20mm   APPROVED

SPECIFICATIONS:

\*Rated current: 6.3A 250V

\*Insulation resistance at 500V DC: 100MΩ Min.

\*Contact resistance: 5mΩ at 1A DC

\*Dielectric strength for 60 seconds: AC 1000V min.

\*Plastic material for body and cover: PBT

\*Insulating body: Flame retarding UL94V0 thermoplastic material.

\*Contact: Nickel or tin plated copper alloy

 MORETHANALL  
CONNECTORS  
ASSEMBLIES

PART NO. FSH-U10-5X20

DWG NO. FSH-U10-5X20

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:  $\phi$ 5.2X20mm Fuse Holder

FILE NO.

DRAWING BY

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

