



0.10


$C \pm 0.25$   
 $B \pm 0.20$   
 $A \pm 0.15$

Lock lever


0.90

0.500TYP

0.50

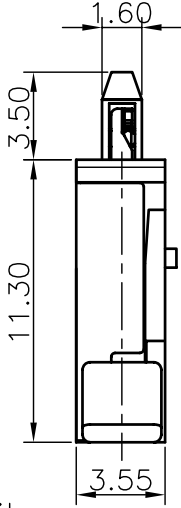

Ground plate

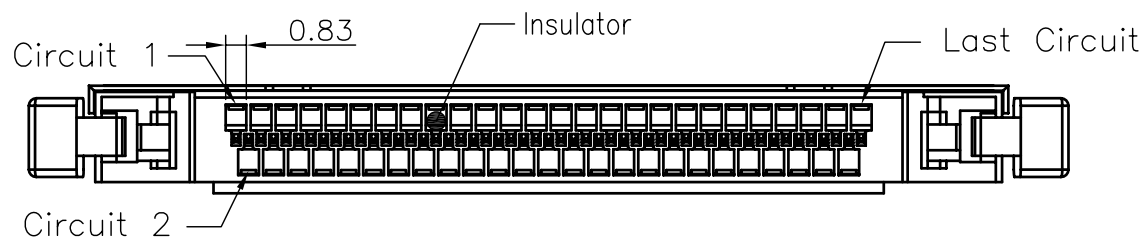

Circuit 1

0.83

Insulator

Last Circuit

Circuit 2

10500H00-NP-XX-NK

① ② ③ ④ ⑤

- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ Material: 46 : Nylon 46,UL 94V-0  
LP : LCP,UL 94V-0
- ⑤ Blank : With Mark  
NK : Without Mark

Specifications:  
 Rated Voltage : 200V AC/DC  
 Rated Current : 0.7A AC,DC  
 Withstand Voltage : 500V AC/minute  
 Contact Resistance : 30mΩ(MAX.)  
 Insulation Resistance : 100MΩ(MIN.)  
 Temperature Range : -40°C~+85°C

Dimensional Ordering Information:

Circuits	Part No	Dimensions C		
		A	B	
21	21P	10.00	17.60	21.25
31	31P	15.00	22.60	26.25
41	41P	20.00	27.60	31.25
51	51P	25.00	32.60	36.25

Suitable for 10500 series terminal

Part No.	Insulator	Color	Ground plate	Lock lever
10500H00-NP-46	Nylon 46,UL 94V-0	Black	Stainless	Stainless
10500H00-NP-46-NK	Nylon 46,UL 94V-0	Black	Stainless	Stainless
10500H00-NP-LP	LCP,UL 94V-0	Black	Stainless	Stainless
10500H00-NP-LP-NK	LCP,UL 94V-0	Black	Stainless	Stainless

JAE FIX Type					GENERAL TOLERANCE			DR.		All Connectors	PART NO.		
REV.	DATE	DESCRIPTION	CHK.	APPD.	X.X ±0.25	X' ±5'	CHK.	APPD.	10500H00-NP-XX-XX				
C0	10.01.25				X.XX ±0.15	X.X' ±2'	CHK.		NUMBER				
					X.XXX ±0.08	▲ MAJOR DIM.	CHK.		ENDE05				
					UNIT mm		APPD.		TITLE		SCALE	SHEET	REV.
									FI-RE 0.50mm PITCH CONN		1/1	1/1	C0