


REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
A		初版发行	YU	06-11/09
B		修改电镀规格	sunquan	11-05/17

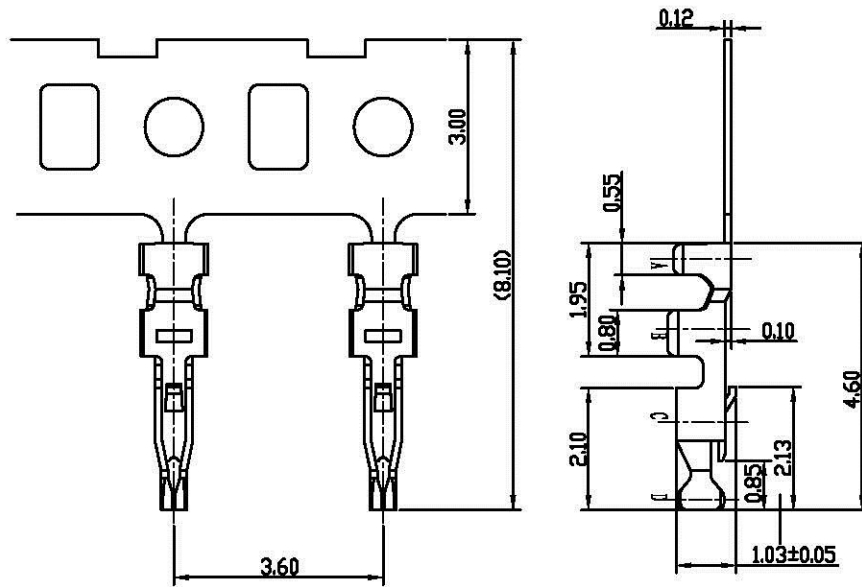


SPECIFICATIONS:

- . Voltage Rating: 80V AC
- . Current Rating: 1.0A
- . Withstanding Voltage: AC 250V/minute
- . Insulation Resistance: 500MΩ MIN
- . Contact Resistance: 30mΩ MAX
- . Temperature Range: -35°C to 85°C

TERMINAL

- . Part No Legend: JS-2453-TXX

Tin Plated T2: Sn>100u" Ni>30u"
 Gold Plated G0: Au>0.8u" Ni>30u"
 G1: Au>3u" Ni>30u"
 G2: Au>5u" Ni>50u"
 G3: Au>8u" Ni>50u"
 G4: Au>15u" Ni>50u"
 . Applicable Wires: AWC#28-36
 . Material: Copper Alloy
 . Thickness: 0.12mm
 . Q'ty: 15,000pcs/Reel

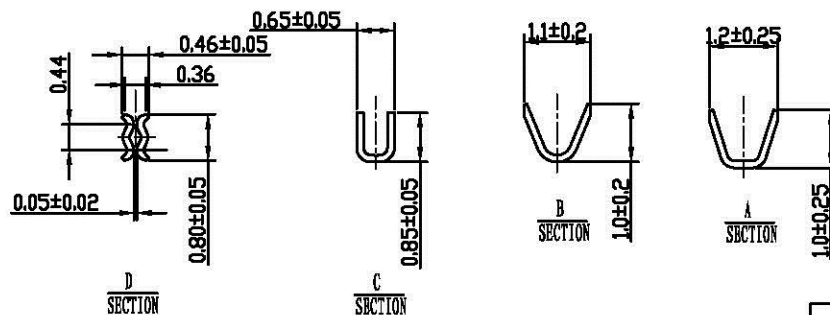

X.± 0.40	X'.± 5.0'	UNITS mm	NAME(INTENDED USE) CUSTOMER	All Connectors <small>INCORPORATED TEL: 0208 711 8888 WWW.ALLCONNECTORS.COM</small>			
.X± 0.30	.X'± 2.0'	MAT'L					
.XX± 0.20	.XX'± 1.0'	FINISH	PART NO.(INTENDED USE) JS-2453-TXX	TITLE: 0.9PITCH WIRE TO BOARD CONNECTOR			
.XXX± 0.10	.XXX'± 0.5'		APPD: liuzhiwen 11-05/17	DWG NO.: 020-0084-2453-T			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CHINA SHUNN ELECTRONIC CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CHINA SHUNN ELECTRONIC CO., LTD.			Q'TY	DR: sunquan 11-05/17			
			<table border="1"> <thead> <tr> <th>SCALE</th> <th>SHEET</th> <th>REV.</th> </tr> </thead> <tbody> <tr> <td>10:1</td> <td>1/1</td> <td>B</td> </tr> </tbody> </table>		SCALE	SHEET	REV.
SCALE	SHEET	REV.					
10:1	1/1	B					