
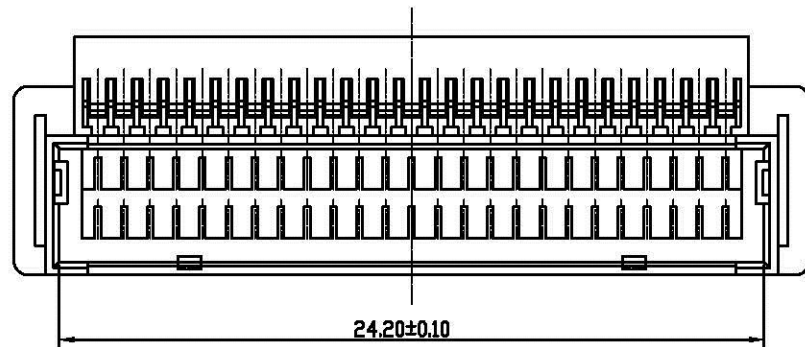
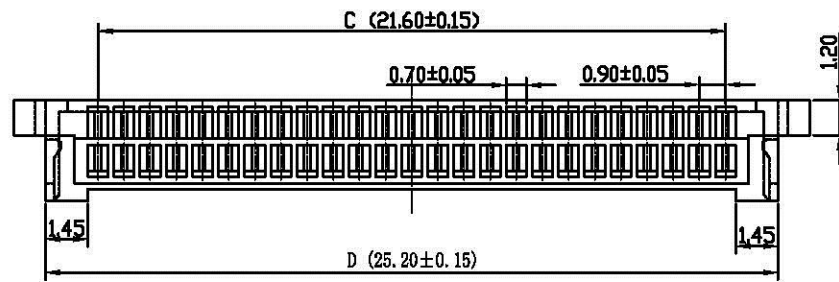

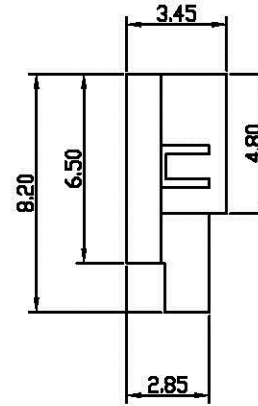


REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
A	/	初版发行	YU	06-11/09

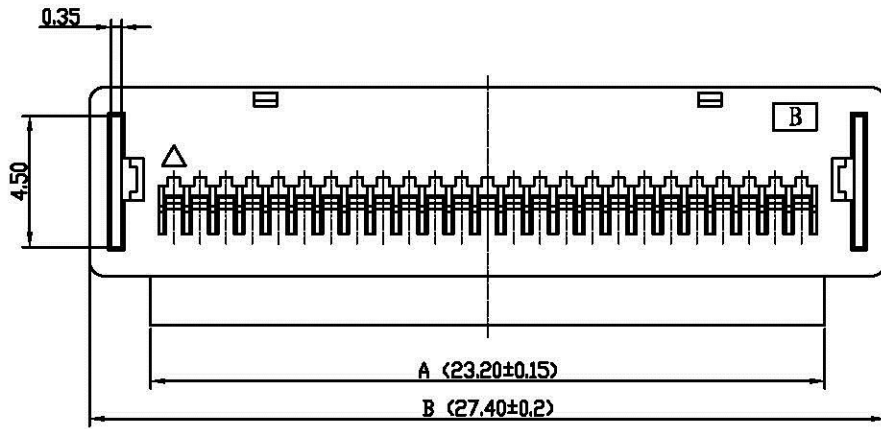

SPECIFICATIONS:

- . Voltage Rating: 80V AC
- . Current Rating: 1.0A
- . Withstanding Voltage: AC 250V/minute
- . Insulation Resistance: 500MΩ MIN
- . Contact Resistance: 30mΩ MAX
- . Temperature Range: -35°C to 85°C

HOUSING

- . Part No Legend: JS-2453-XX
- . Poles: 40,50
- . Material: PA46 UL 94V-0
- . Q'ty: 1,000pcs/Bag

Poles	A	B	C	D
JS-2453-40	待开发			
JS-2453-50	23.20	27.40	21.60	25.20

X.± 0.50	X.± 3.0'	UNITS	mm	NAME(INTENDED USE) CUSTOMER	 <small>www.allconnectors.de Tel.: 0049 711 700591 All-NA@allconnectors.de</small>
.X± 0.30	.X± 2.0'	MAT'L			
.XX± 0.15	.XX± 1.0'	FINISH		PART NO.(INTENDED USE) JS-2453-XX	TITLE: 0.9PITCH WIRE TO BOARD CONNECTOR
.XXX± 0.05	.XXX± 0.5'		Q'TY		APPD: liuzhiwen 06-11/09
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CHING SHUNH ELECTRONIC CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CHING SHUNH ELECTRONIC CO., LTD.</small>				CHKD:	
				DR: YU	06-11/09