

REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
A		初版发行	YU	06-11/09
B		修改特性叙述	sunquan	11-05/17

SPECIFICATIONS:

Voltage Rating: 80V AC

Current Rating: AWG28: 1.0A

AWG30: 0.5A

AWG32~36: 0.3A

Withstanding Voltage: AC 250V/minute

Insulation Resistance: 500MΩ MIN

Contact Resistance: 30mΩ MAX

Temperature Range: -35℃ to 85℃

WAFER

· Part No Legend: JS-2454-XX

· Poles: 40,50





· Material:

Base: High Temp. Thermoplastic UL94V-0

Contact: Copper Alloy

· Finish: Gold Plated

· Q'ty: 1,000pcs/reel

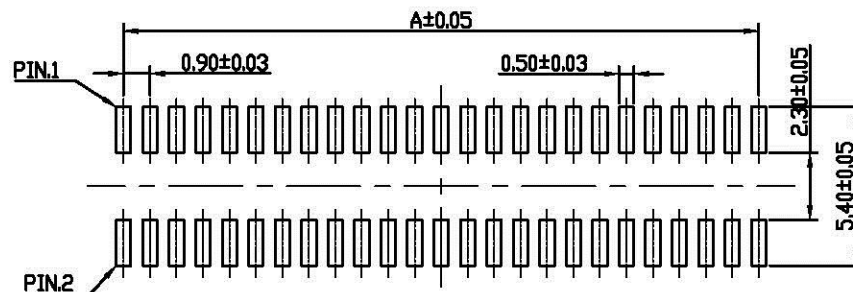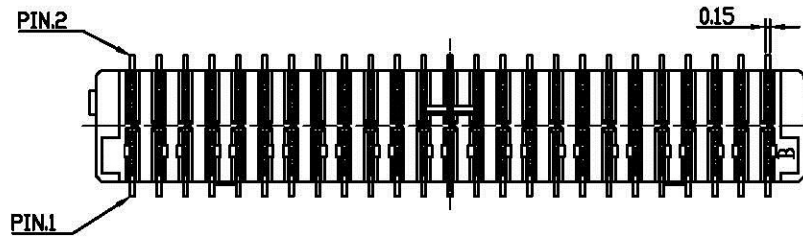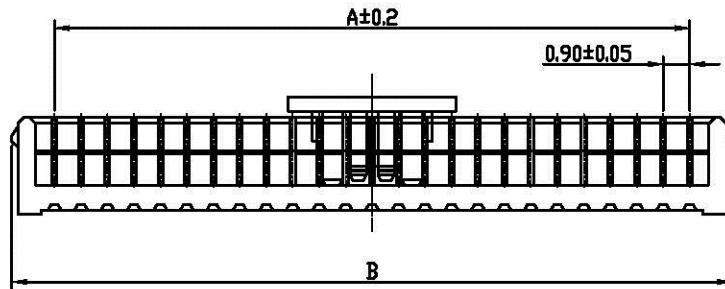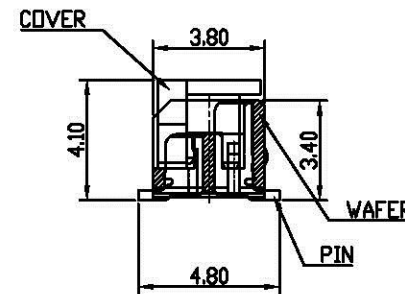

Applicable P.C.B. Dimension (REF.)
适合基板尺寸 (参考)

Poles	A	B
JS-2454-40	17.1	20.00
JS-2454-50	21.6	24.50

X.± 0.4	X'.± 5.0'	UNITS mm	NAME(INTENDED USE)	All Connectors www.allconnectors.com Tel: +86 755 7002988 70544118@allconnect.com.cn	TITLE: 0.9PITCH WIRE TO BOARD CONNECTOR
.X± 0.3	.X'.± 2.0'		CUSTOMER		
.XX± 0.2	.XX'.± 1.0'	FINISH	PART NO.(INTENDED USE)	DWG NO.: 020-0085-2454-XX	
.XXX± 0.1	.XXX'.± 0.5'		JS-2454-XX		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CHINA SHUNN ELECTRONIC CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CHINA SHUNN ELECTRONIC CO., LTD.			APPD: liuzhiwen 11-05/17	SCALE SHEET REV. 10:1 1/1 B	
			Q'TY		CHKD:
			DR: sunquan 11-05/17		