
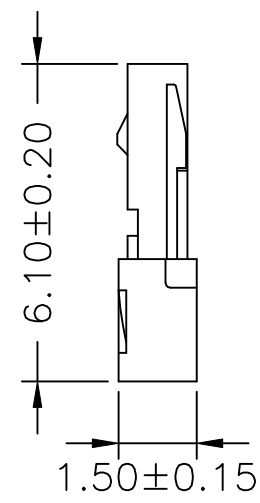
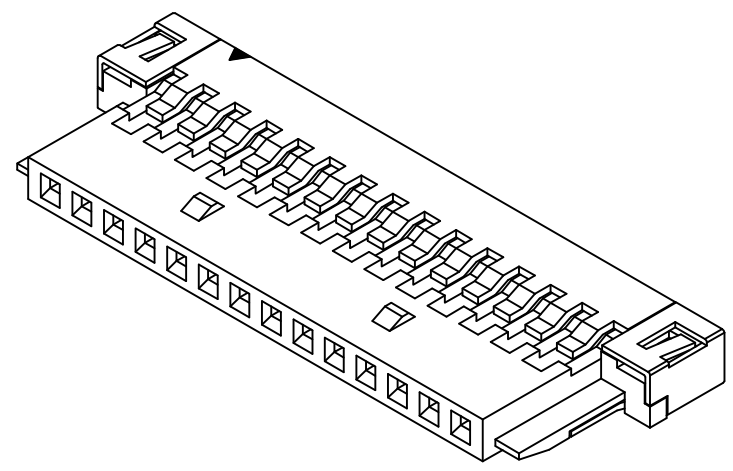
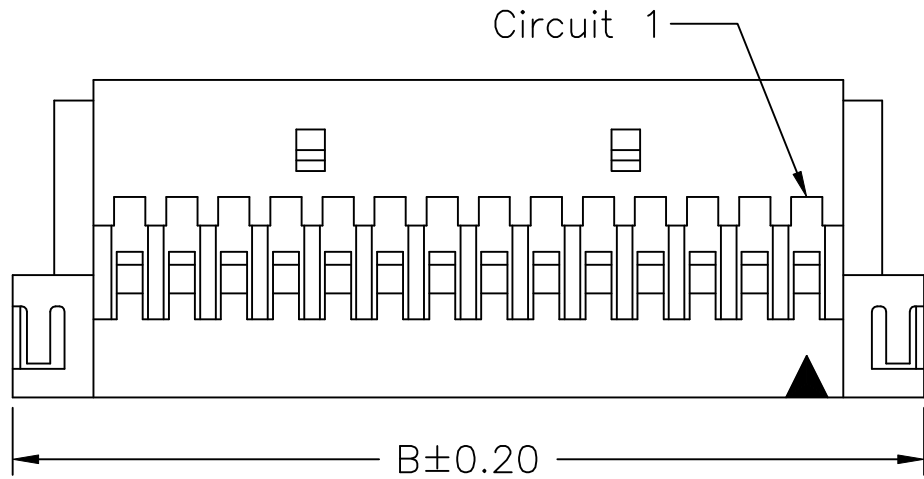


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

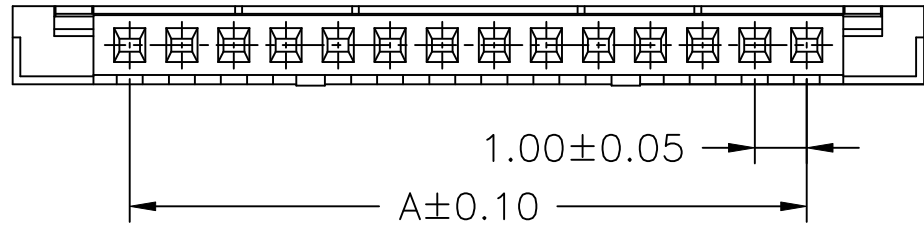

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Shell: Phosphor Bronze/Tin-plated
 Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
DF19-HM-08	7.00	11.50
DF19-HM-14	13.00	17.50
DF19-HM-20	19.00	23.50
DF19-HM-30	29.00	33.50

DF19-HM-xx-LF
LEADFREE

RoHS Compliant

All Connectors
 www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. DF19-HM-xx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
DWG NO. DF19-HM-xx							
FILE NO.		PROJECTION	AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1						