




SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC
 Voltage Rating: 50V AC/ max.
 Operating Temp.: -25°C ~ +85°C
 Insulation Resistance: 500MΩ/ min.
 Dielectric Withstanding Voltage: 500V AC/ min.
 Contact Resistance: 20MΩ/ max.

Material

Material: PBT, UL94V-0

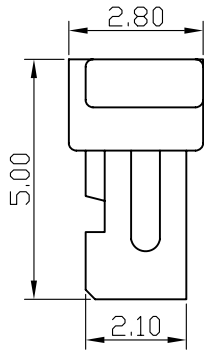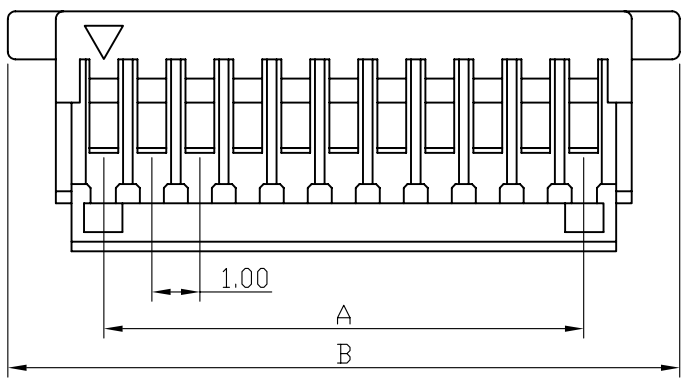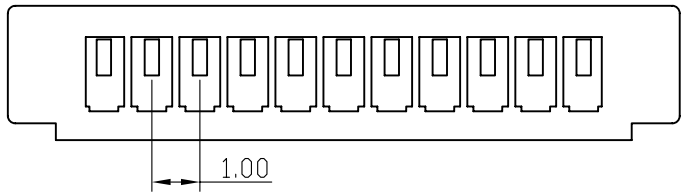

B尺寸公差如下:
 2P~10P±0.10mm
 11P~20P±0.20mm

SH-H-xx-LF
 LEADFREE
 RoHS Compliant

Poles	Dimension mm (in.)		Note.
	A	B	
2	1.0(0.039)	5.0(0.197)	SH-H-02
3	2.0(0.079)	6.0(0.236)	SH-H-03
4	3.0(0.118)	7.0(0.276)	SH-H-04
5	4.0(0.157)	8.0(0.315)	SH-H-05
6	5.0(0.197)	9.0(0.354)	SH-H-06
7	6.0(0.236)	10.0(0.394)	SH-H-07
8	7.0(0.276)	11.0(0.433)	SH-H-08
9	8.0(0.315)	12.0(0.472)	SH-H-09
10	9.0(0.354)	13.0(0.512)	SH-H-10
11	10.0(0.394)	14.0(0.551)	SH-H-11
12	11.0(0.433)	15.0(0.591)	SH-H-12
13	12.0(0.472)	16.0(0.630)	SH-H-13
14	13.0(0.512)	17.0(0.669)	SH-H-14
15	14.0(0.551)	18.0(0.709)	SH-H-15
16	15.0(0.591)	19.0(0.748)	SH-H-16
17	16.0(0.630)	20.0(0.787)	SH-H-17
18	17.0(0.669)	21.0(0.827)	SH-H-18
19	18.0(0.709)	22.0(0.866)	SH-H-19
20	19.0(0.748)	23.0(0.906)	SH-H-20

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. SH-H-xx		APPROVED BY CY		TOLERANCES ARE		DESCRIP TION:			
DWG NO. SH-H-xx		DRAWING BY		.X .XX .XXX AWG					
FILE NO.		PROJECTION				AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1								