

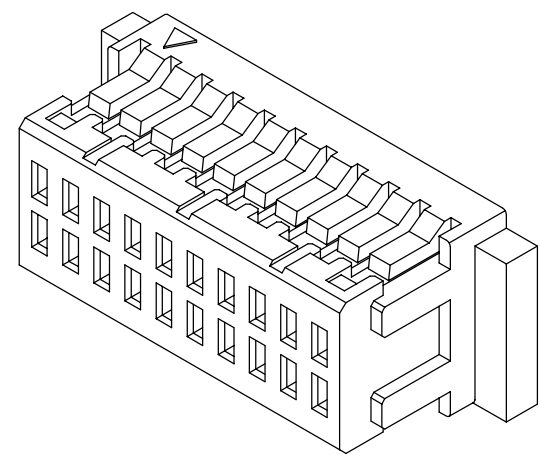
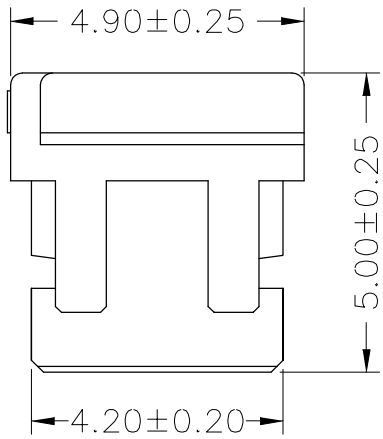


1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

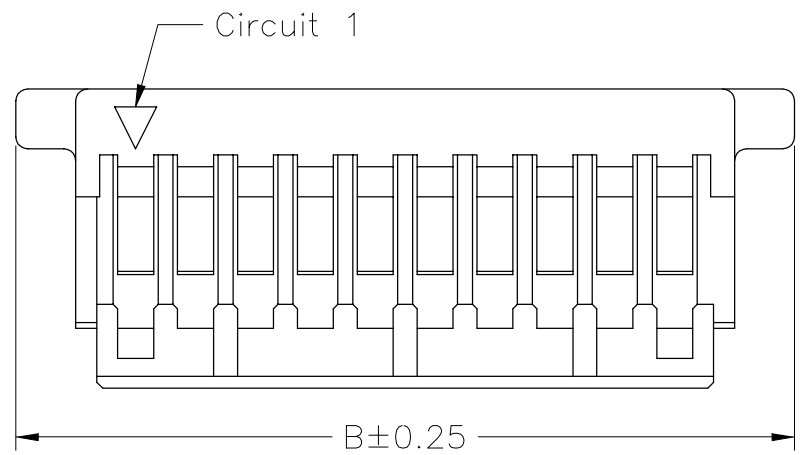

**SPECIFICATIONS**  
 Current Rating: 1A AC,DC  
 Voltage Rating: 50V AC,DC  
 Temperature Range:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$   
 Contact Resistance:  $20\text{m}\Omega$  Max.  
 Insulation Resistance:  $500\text{M}\Omega$  Min.  
 Withstanding Voltage: 500V AC/minute  
 Material: PBT,UL94V-0

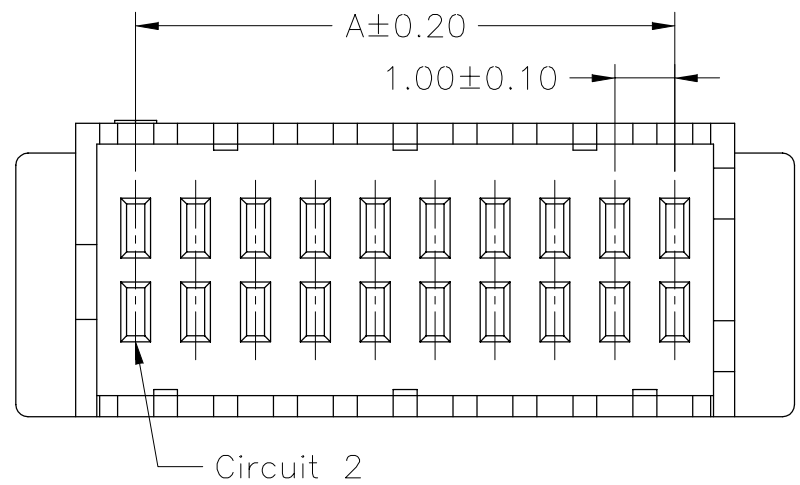

**SHD-H-xx-LF**  
 LEADFREE  
**RoHS Compliant**

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
<b>SHD-H-20</b>	9.00	13.00
<b>SHD-H-30</b>	14.00	18.00
<b>SHD-H-40</b>	19.00	23.00
<b>SHD-H-50</b>	24.00	28.00

**Allconnectors**  
 www.allconnectors.eu | info@allconnectors.eu  
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. <b>SHD-H-xx</b>		CHECKED BY CY	TOLERANCES ARE .X $\pm 0.2$ .XX $\pm$ .XXX $\pm$ AWG	DESCRIP TION: 1.0mm HOUSING-DUAL ROW			
DWG NO. <b>SHD-H-xx</b>				DRAWING BY	AREA	REVISIONS	HK
FILE NO.		PROJECTION					
UNIT / mm	SCALE 1:1						