


Features:

- 10, 20, 30, 40 circuits available
- .014" (0.35mm) square pin
- Pin Material: Gold-flash brass
- Insulation: Nylon 9T

Specification:

- Current rating : 1A AC, DC
- Voltage rating: 100V AC, DC
- Contact resistance: 20mΩ max.
- Dielectric withstanding voltage: 500V AC/minute
- Ambient temperature range: -25°C ~ 85°C

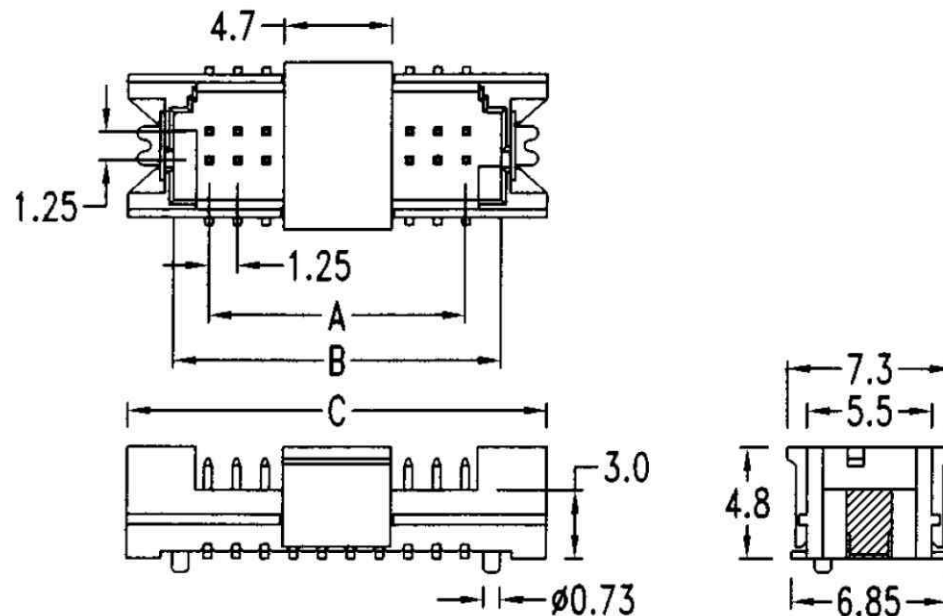


DF13-VPGC-2Xxx-LF
LEADFREE

RoHS Compliant

Dimensional Information (mm)

| Circuits | Dim. A | Dim. B | Dim. C |
|----------|--------|--------|--------|
| 10 | 5.00 | 8.10 | 12.2 |
| 20 | 11.25 | 14.35 | 18.5 |
| 30 | 17.50 | 20.60 | 24.8 |
| 40 | 23.75 | 26.85 | 31.1 |

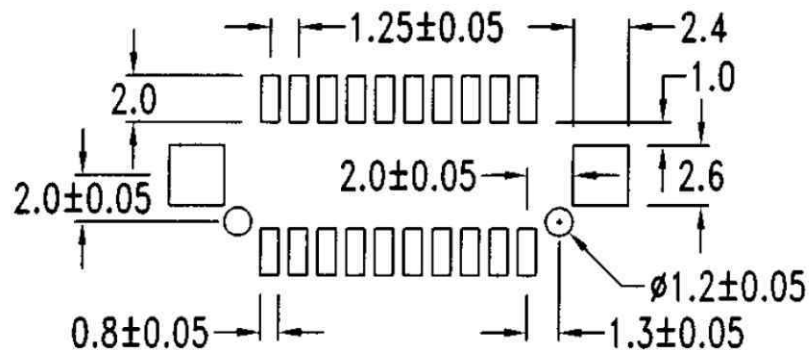

PCB layout: Solider side

PART NO. DF13-VPGC-2Xxx

DWG NO. DF13-VPGC-2Xxx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ±
.XX ±
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25