
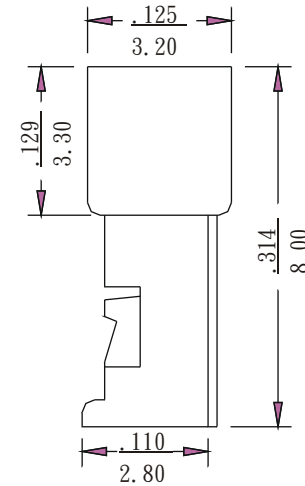
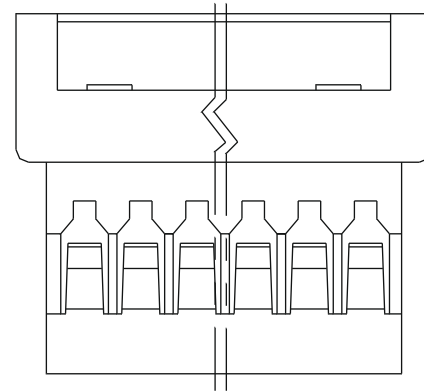


- * Material : Nylon UL 94V-0
- * Current rating : 1A, AC/DC
- * Voltage rating : 125V , AC/DC
- * Color : White
- * Accepts FH-M-28 terminal housings
- * 2-15 circuits available

inch
mm




FH-P-xx-LF
└
LEADFREE

RoHS Compliant

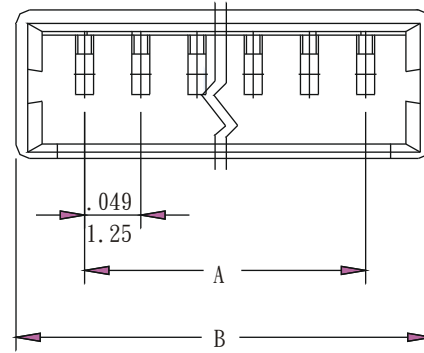

Dimensional information - inch/mm (H125P1)

Circuits	Dim. A		Dim. B		Circuits	Dim. A		Dim. B	
	inch	mm	inch	mm		inch	mm	inch	mm
2	0.049	1.25	0.167	4.25	9	0.394	10.00	0.512	13.00
3	0.098	2.50	0.217	5.50	10	0.443	11.25	0.561	14.25
4	0.148	3.75	0.266	6.75	11	0.492	12.50	0.610	15.50
5	0.197	5.00	0.315	8.00	12	0.541	13.75	0.659	16.75
6	0.246	6.25	0.364	9.25	13	0.591	15.00	0.709	18.00
7	0.295	7.50	0.413	10.50	14	0.640	16.25	0.758	19.25
8	0.344	8.75	0.463	11.75	15	0.689	17.50	0.807	20.50

PART NO. FH-P-xx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG		DESCRIPTION:			
FILE NO.		DRAWING BY		PROJECTION 		AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1	PROJECTION 		PROJECTION 		AREA	REVISIONS	HK	DATE

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25