
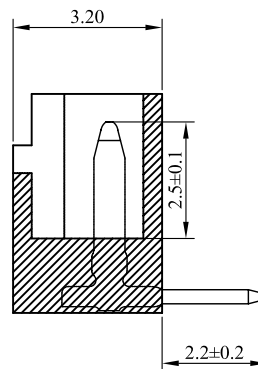


RECOMMENDED PC BOARD HOLE DIMM.

LOCKING WINDOW:
ONE PLACE FOR 2 AND 3 CKT.
AND TWO PLACES FOR MORE THAN 3 CKT.

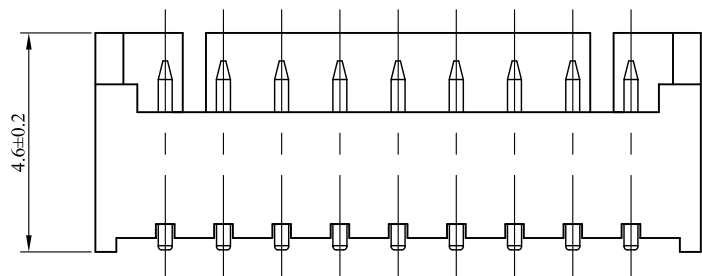

MATERIAL:

WAFER:HIGH TEMPERA TURE PLASTIC
NYLON46 UL94V-0
PIN:HIGH STRENGTH BRASS
WITH TIN OVER NICKEL PLATED


SPECIFICATION:

CURRENT RATE: 1 AMP
IUSULATION RESISTANCE: 500 M MIN
CONTACT RESISTANCE: 20 M MAX
DIELECTRIC VOLTAGE: 500 V AC FOR ONE MINUTE
OPERATION TEMPERATURE: -25°C TO +85°C

| CKT. | A | B | C |
|------|-------|-------|-------|
| 2 | 1.25 | 3.15 | 4.25 |
| 3 | 2.50 | 4.40 | 5.50 |
| 4 | 3.75 | 5.65 | 6.75 |
| 5 | 5.00 | 6.90 | 8.00 |
| 6 | 6.25 | 8.15 | 9.25 |
| 7 | 7.50 | 9.40 | 10.50 |
| 8 | 8.75 | 10.65 | 11.75 |
| 9 | 10.00 | 11.90 | 13.00 |
| 10 | 11.25 | 13.15 | 14.25 |
| 11 | 12.50 | 14.40 | 15.50 |
| 12 | 13.75 | 15.65 | 16.75 |
| 13 | 15.00 | 16.90 | 18.00 |
| 14 | 16.25 | 18.15 | 19.25 |
| 15 | 17.50 | 19.40 | 20.50 |

FH-R-xx-LF
T
LEADFREE

RoHS Compliant

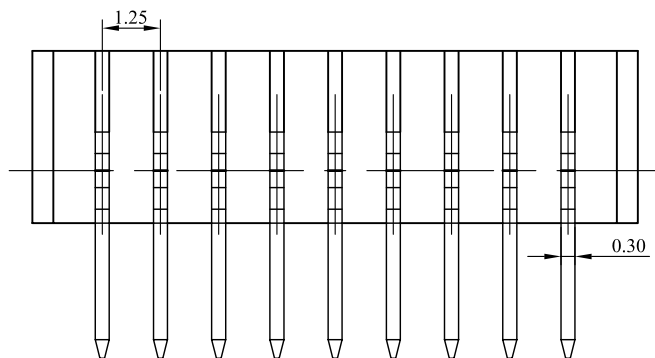

| | | | | | | | |
|------------------|-----------|----------------|--|--------------------------------------|--|--|--|
| PART NO. FH-R-xx | | APPROVED BY CY | | TOLERANCES ARE | | DESCRIP TION: WIRE TO BOARD 1.25mm WAFER DIP 90° | |
| DWG NO. FH-R-xx | | DRAWING BY | | .X ± 0.5 .XX ± 0.1 .XXX AWG | | AREA | |
| FILE NO. | | PROJECTION | | REVISIONS | | HK | |
| UNIT / mm | SCALE 1:1 | DATE | | | | | |