





1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

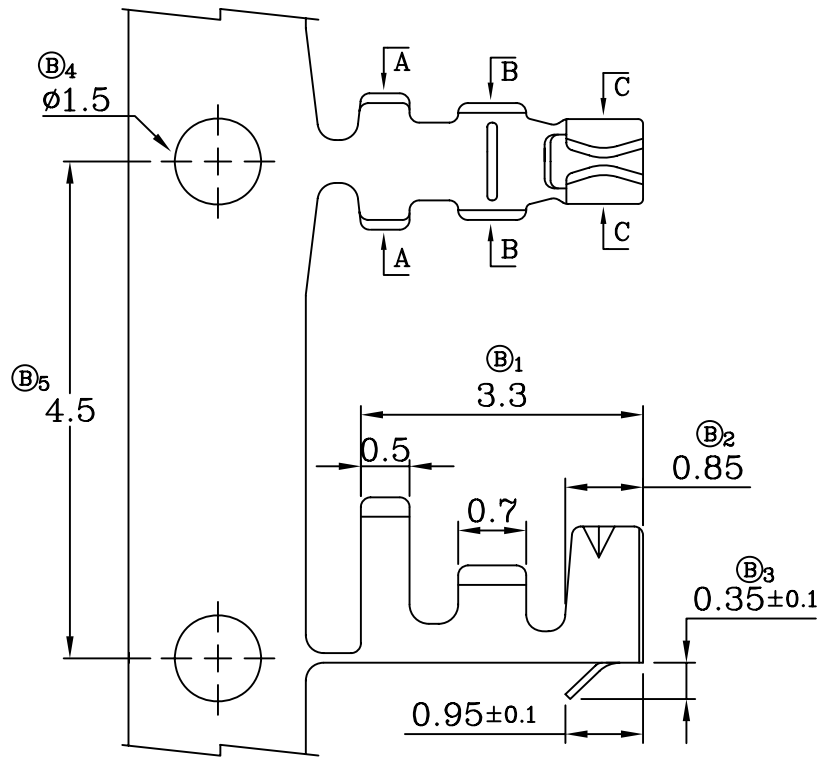

FH-T-28-LF
LEADFREE

RoHS Compliant

SPECIFICATIONS

Electrical
 Current Rating: 1A AC, DC
 Voltage Rating: 125V AC/ max.
 Operating Temp.: -25°C ~ +85°C
 Insulation Resistance: 100MΩ/ min.
 Dielectric Withstanding Voltage: 250V AC/ min.
 Contact Resistance: 20mΩ/ max.

Material
 Terminal material: Phosphor Bronze/ Tin-plated
 Wire Range: 28 to 32AWG

PART NO. FH-T-28		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: 1.25mm Terminal		
DWG NO. FH-T-28		DRAWING BY			AREA	REVISIONS	HK
FILE NO.		PROJECTION					
UNIT / mm	SCALE 1 : 1						