


SPECIFICATION

CURRENT RATING: 1A AC/DC
 PITCH BETWEEN POLES: 1.5mm
 VOLTAGE RATING: 100V AC/DC
 TEMPERATURE RANGE: -25°C TO +85°C
 INSULATION RESISTANCE: 500Mohm MIN
 WITHSTAND VOLTAGE: 500V AC/MINUTE
 APPLICABLE WIRE: AWG #26 TO #32
FEATURES
 MATERIAL: NYLON 66 UL94-V0

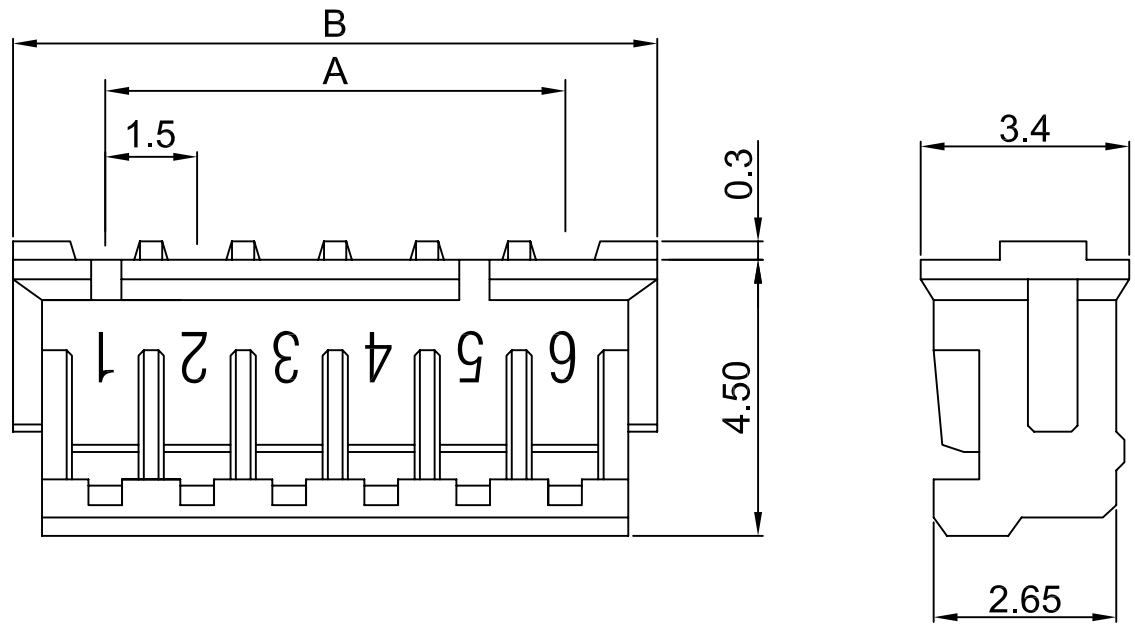

Circuits	Dim. A	Dim. B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00

PART NO. ZH-H-xx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:
DWG NO. ZH-H-xx		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE