


10275

Wire to Wire 2.03mm ϕ connectors

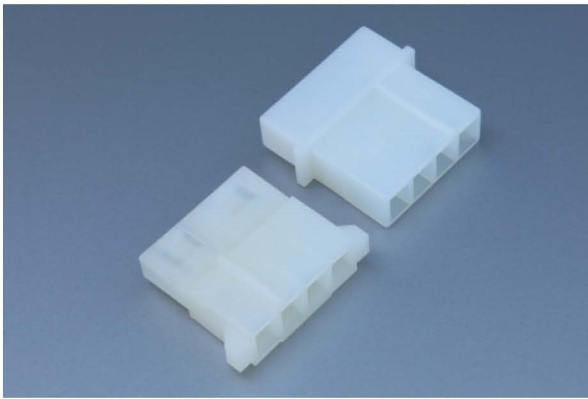

PERFORMANCE

Electrical Rating: AC/DC 250V 7A
額定電壓電流
Insulation Resistance: 1000M Ω min.
絕緣阻抗
Withstanding Voltage: 1000V AC/minute
耐電壓
Temperature Range: -25°C~+85°C
適用溫度



TERMINAL

Part No.: 10275BS-2

產品編號

Thickness: 0.25mm

銅板厚度

Material: Brass

材質 黃銅

Surface Treatment: Tin-plated

表面處理

鍍錫

Acceptable Wire: AWG# 16~22

適用電線

Insulation O.D.: 2.10~2.50mm

線皮外徑

Suitable Contact: 112751BS-2


配合端子

Suitable Housing: P102754

配合塑膠

Packing: 7,500PCS(Reel)

包裝數量

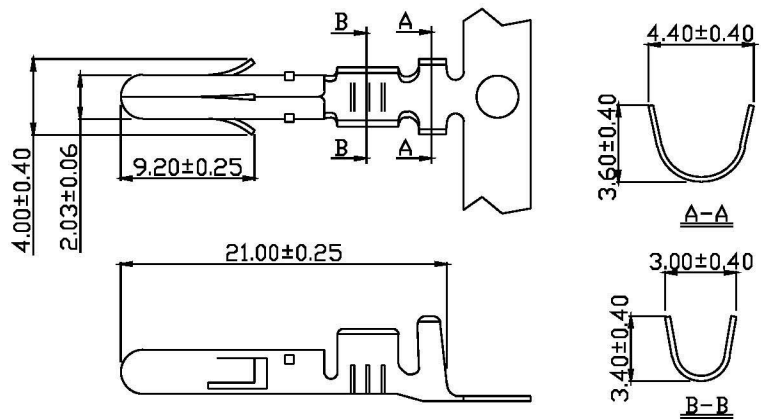

HOUSING

Part No.: P102754

產品編號

Material: Nylon 94V-2

材質

Suitable Contact: 10275BS-2

配合端子

Suitable Housing: P112754

配合公座

Acceptable Wire: AWG# 16~22

適用電線

Packing: 500PCS (Bag)

包裝數量

