
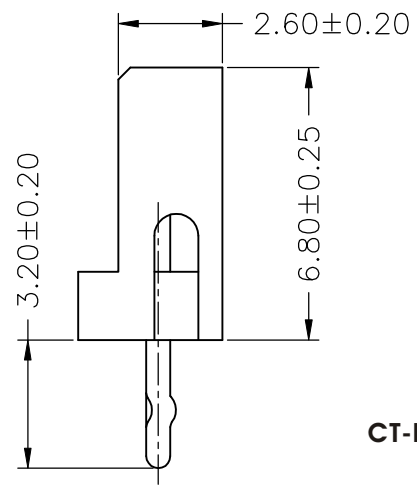


SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
CT-D-02	2.00	5.96
CT-D-03	4.00	7.96
CT-D-04	6.00	9.96
CT-D-05	8.00	11.96
CT-D-06	10.00	13.96
CT-D-07	12.00	15.96
CT-D-08	14.00	17.96
CT-D-09	16.00	19.96
CT-D-10	18.00	21.96
CT-D-11	20.00	23.96
CT-D-12	22.00	25.96
CT-D-13	24.00	27.96
CT-D-14	26.00	29.96
CT-D-15	28.00	31.96

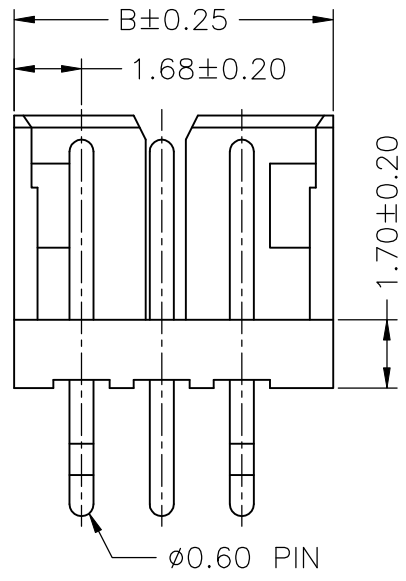

CT-D-xx-LF
LEADFREE

RoHS Compliant

All Connectors
 www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. CT-D-xx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: 2.00mm PITCH 180° WAFER			
DWG NO. CT-D-xx		DRAWING BY			AREA	REVISIONS	HK	DATE
FILE NO.	UNIT / mm	SCALE 1:1	PROJECTION					