


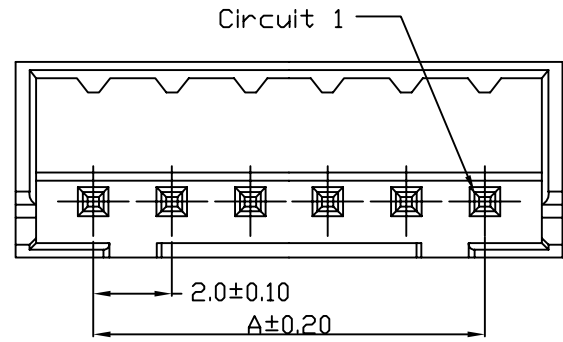


SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30m ohm Min.
 Insulation Resistance: 1000 M OHM Min.
 Withstanding Voltage: 650V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Black

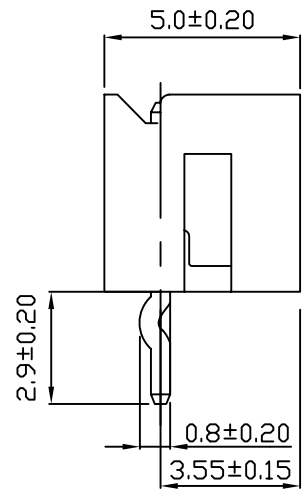

DF3-D-xx-LF
 LEADFREE
 RoHS Compliant

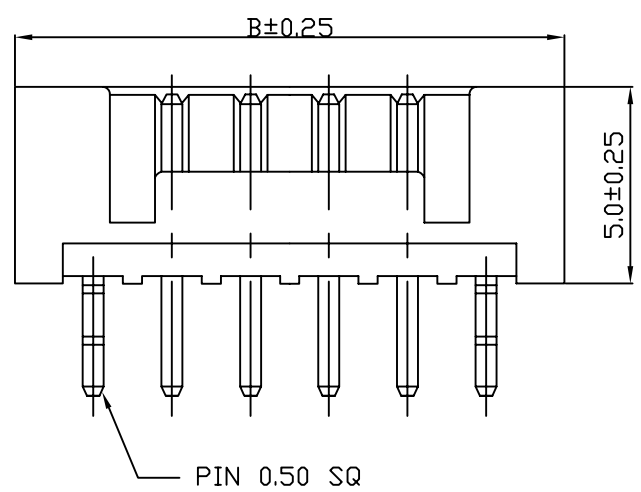

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
DF3-D-02	2.00	6.00
DF3-D-03	4.00	8.00
DF3-D-04	6.00	10.00
DF3-D-05	8.00	12.00
DF3-D-06	10.00	14.00
DF3-D-07	12.00	16.00
DF3-D-08	14.00	18.00
DF3-D-09	16.00	20.00
DF3-D-10	18.00	22.00
DF3-D-11	20.00	24.00
DF3-D-12	22.00	26.00
DF3-D-13	24.00	28.00
DF3-D-14	26.00	30.00
DF3-D-15	28.00	32.00

Allconnectors
 www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. DF3-D-xx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG
DWG NO. DF3-D-xx			
FILE NO.		DRAWING BY	DESCRIP TION:
UNIT / mm	SCALE 1:1	PROJECTION	

AREA	REVISIONS	HK	DATE
------	-----------	----	------