
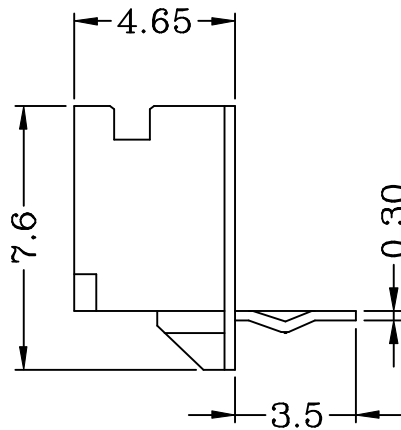


PCB LAYOUT

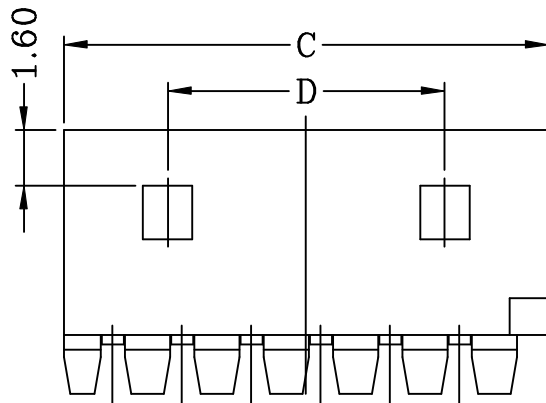

Specifications:

Poles	2~15 Poles
Material	PBT UL 94V-0 with 30% GF
Pitch between poles	2.0mm
Rated Voltage	125V AC,DC
Rated Current	1A
Withstand Voltage	800V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	1,000MΩ (MIN.)
Temperature Range	-25~+95°C
Applicable Wire Range	AWG #24~#28

Dimensional & Ordering Information:

Circuits	Part No	Dimensions				Pcs/Bag
		A	B	C	D	
2	MH-R-02	2.00	5.10	6.00	—	1000
3	MH-R-03	4.00	7.10	8.00	—	1000
4	MH-R-04	6.00	9.10	10.00	4.00	1000
5	MH-R-05	8.00	11.10	12.00	6.00	1000
6	MH-R-06	10.00	13.10	14.00	8.00	1000
7	MH-R-07	12.00	15.10	16.00	10.00	1000
8	MH-R-08	14.00	17.10	18.00	12.00	1000
9	MH-R-09	16.00	19.10	20.00	14.00	1000
10	MH-R-10	18.00	21.10	22.00	16.00	1000
11	MH-R-11	20.00	23.10	24.00	18.00	1000
12	MH-R-12	22.00	25.10	26.00	20.00	1000
13	MH-R-13	24.00	27.10	28.00	22.00	1000
14	MH-R-14	26.00	29.10	30.00	24.00	1000
15	MH-R-15	28.00	31.10	32.00	26.00	1000

PART NO. MH-R-xx

DWG NO. MH-R-xx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X
.XX
.XXX
AWG

DESCRIP TION:

AREA	REVISIONS	HK	DATE
------	-----------	----	------



www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25