



**MATERIALS :**

- 1. HOUSING : NYLON 6T. (UL 94V-0), BLACK.
  - 2. TERMINAL : S.Q. 0.5mm BRASS, GOLD PLATING.
- SPECIFICATION**
- 1. CURRENT RATING : 1 AMP. MAX.
  - 2. DIELECTRIC WITHSTAND VOLTAGE : 800V AC R.M.S. FOR 1 MINTUE.
  - 3. INSULATION RESISTANCE : 5,000M OHMS MIN. AT 500V DC.
  - 4. OPERATING TEMPERATURE : -55°C TO +105°C.
  - 5. MAX. PROCESSING TEMPERATURE : 230°C FOR 30 TO 60 SECONDS.

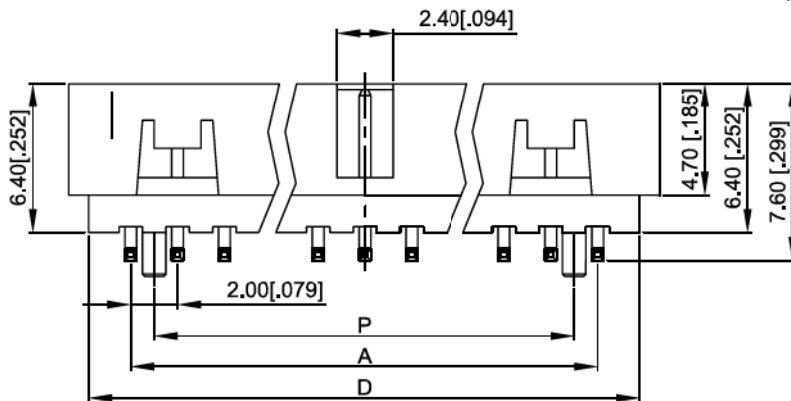

How to order Please replace "X" with appropriate coding listed in the table below.  
Part Number

Number Of Position	DIMENSIONS					
	A	B	C	D	E	P
10	8.00	10.85	12.65	11.00	—	6.00
12	10.00	12.85	14.65	13.00	—	8.00
14	12.00	14.85	16.65	15.00	8.00	10.00
16	14.00	16.85	18.65	17.00	10.00	12.00
20	18.00	20.85	22.65	21.00	14.00	16.00
26	24.00	26.85	28.65	27.00	20.00	22.00
30	28.00	30.85	32.65	31.00	24.00	26.00
34	32.00	34.85	36.65	35.00	28.00	30.00
40	38.00	40.85	42.65	41.00	34.00	36.00
44	42.00	44.85	46.65	45.00	38.00	40.00
50	48.00	50.85	52.65	51.00	44.00	46.00

MPVK-VP-2Xxx-LF  
LEADFREE  
2X05:10WAY  
2X06:12WAY  
2X25:50WAY

RoHS Compliant



www.allconnectors.eu | info@allconnectors.eu  
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. MPVK-VP-2Xxx		CHECKED BY CY		TOLERANCES ARE		DESCRIPTION: 0.079"(2.00mm) Box Header, Molex Type Dual Row, SMD			
DWG NO. MPVK-VP-2Xxx		DRAWING BY		.X ± 0.3 .XX ± 0.2 .XXX ± .015					
FILE NO.		PROJECTION		AREA		REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1	PROJECTION		AREA		REVISIONS	HK	DATE	