
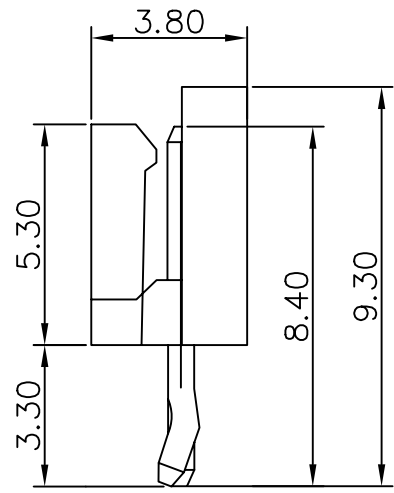


Material: Nylon UL 94V-0
 Contact: Phosphor bronze
 Current rating: 1A, AC/DC
 Voltage rating: 125V, AC/DC
 Standard color: white

RECOMMENDED PCB LAYOUT

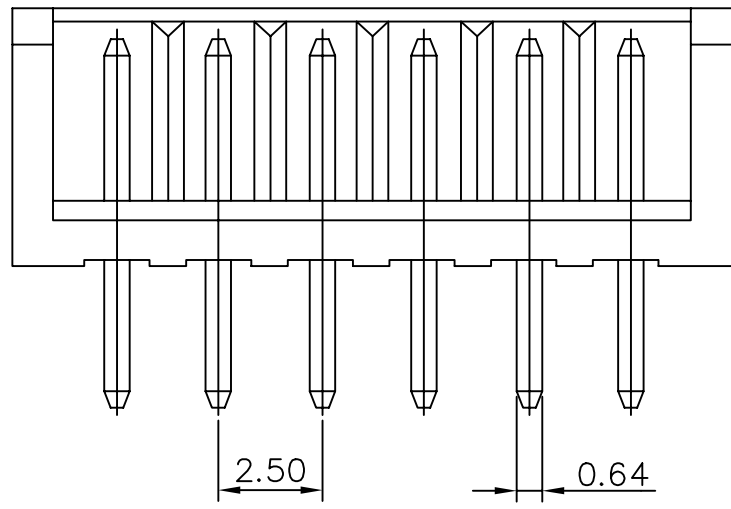

Circuits	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

PART NO. EH-D-xx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:					
DWG NO. EH-D-xx					DRAWING BY	AREA	REVISIONS	HK	DATE
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								